


SERIE 360



CARATTERISTICHE TECNICHE
TECHNICAL CHARACTERISTICS
TECHNISCHE ANGABEN
CARACTÉRISTIQUES TECHNIQUES
CARACTERÍSTICAS TÉCNICAS
CARACTERÍSTICAS TÉCNICAS

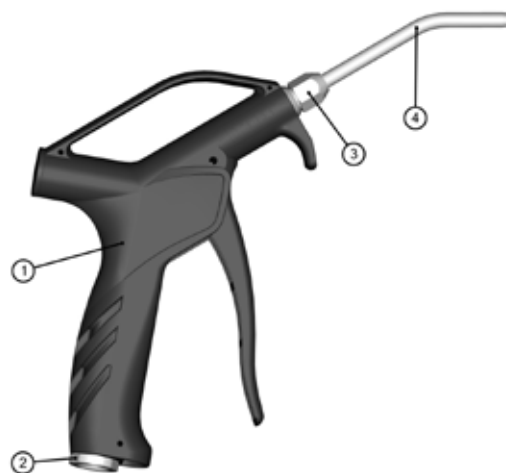

Fluidi compatibili
Aria compressa

Fluids
Compressed air

Geeignete Medien
Druckluft

Fluides compatibles
Air comprimé

Fluidos compatibles
Aire comprimido

Fluidos compatíveis
Ar comprimido

Materiali e Componenti

IT

- 1 Corpo centrale in Tecnopolimero
- 2 Attacco terminale in Alluminio anodizzato
- 3 Dado di serraggio in Ottone nichelato
- 4 Ugello di soffiaggio in acciaio Inox AISI 304

Component Parts and Materials

GB

- 1 Technopolymer Body
- 2 Anodized aluminum Back Connection
- 3 Nickel-plated Brass Locking Nut
- 4 Stainless Steel AISI 304 Nozzle

Komponenten und Materialien

DE

- 1 Körper Technopolymer
- 2 Einschraubkörper Eloxiertes Aluminium
- 3 Sicherungsmutter Messing vernickelt
- 4 Blasdüsenrohr Edelstahl AISI 304

Matériaux et Composants

FR

- 1 Corps: Technopolymère
- 2 Corps: Aluminium anodisé
- 3 Ecrou: Laiton nickelé
- 4 Embout: Acier inoxydable AISI 304

Materiales y Componentes

ES

- 1 Cuerpo en Tecnopolimero
- 2 Conexión terminal en Aluminio anodizado
- 3 Tuerca de bloqueo en latón niquelado
- 4 Boquilla de soplado en acero AISI 304

Materiais e Componentes

PT

- 1 Corpo em Tecnopolímero
- 2 Conexão terminal em Alumínio anodizado
- 3 Porca de travamento em latão niquelado
- 4 Boquilla de soplado em aço AISI 304

361

PISTOLA DI SOFFIAGGIO CON TUBO INOX


BLOWGUN WITH STAINLESS STEEL NOZZLE

BLASPISTOLE MIT EDELSTAHL ROHR

SOUFFLETTE AVEC EMBOUT ACIER INOXYDABLE

PISTOLA DE SOPLADO CON TUBO ACERO INOXIDABLE

PISTOLA DE AR COM BICO DE AÇO INOXIDÁVEL

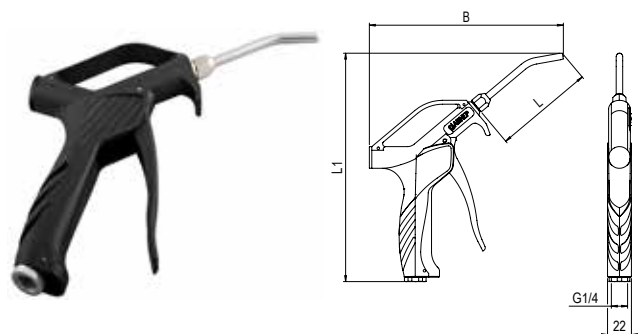

Code	L	L1	B	Pack.
00361 00 001	90	213.5	179	10
		min	max	
	Temperature		- 10 °C	+ 80 °C
	Pressure		12 bar (1.2 MPa)	
	433 NI/min @ 6 bar - 533 NI/min @ 8 bar			
	LAeq 89 dBA @ 6 bar			
	LAeq 90 dBA @ 8 bar			
	Forza su maniglia - Force on handle Kraft am Griff - Force sur la poignée Fuerza en el mango - Força no punho		19,8 N @ 6 bar	
	Forza di soffiaggio - Blowing force Kraft der Schlag - Force de soufflage Fuerza que sopla - Força de sopra		3,7 N @ 6 bar	
	2003/10/CE		Max 85 dBA	3 hr @ 6 bar 3 hr @ 8 bar
	OSHA 1910.95 (b)		Max 90 dB 8 hr	

362

PISTOLA DI SOFFIAGGIO CON TUBO INOX DI SICUREZZA


BLOWGUN WITH STAINLESS STEEL SAFETY NOZZLE

BLASPISTOLE MIT EDELSTAHL-SICHERHEITS ROHR

SOUFFLETTE AVEC EMBOUT DE SÉCURITÉ ACIER INOXYDABLE

PISTOLA DE SOPLADO CON TUBO DE SEGURIDAD ACERO INOXIDABLE

PISTOLA DE AR COM BICO DE SEGURANÇA DE AÇO INOXIDÁVEL

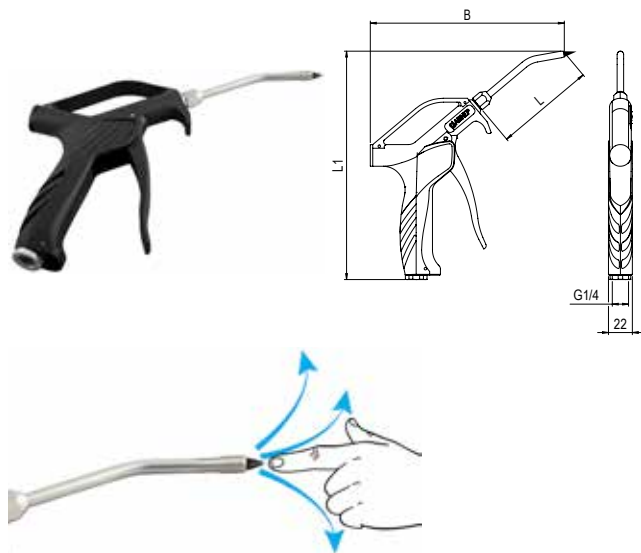

Code	L	L1	B	Pack.
00362 00 001	90	213.5	185.5	10
		min	max	
	Temperature	- 10 °C		+ 80 °C
	Pressure	12 bar (1.2 MPa)		
	383 NI/min @ 6 bar - 500 NI/min @ 8 bar			
	LAeq 78 dBA @ 6 bar			
	LAeq 84 dBA @ 8 bar			
	Forza su maniglia - Force on handle Kraft am Griff - Force sur la poignée Fuerza en el mango - Força no punho	19,8 N @ 6 bar		
	Forza di soffiaggio - Blowing force Kraft der Schlag - Force de soufflage Fuerza que sopla - Força de sopra	3,4 N @ 6 bar		
	2003/10/CE	Max 85 dBA	8 hr @ 6 bar 6 hr @ 8 bar	
	OSHA 1910.95 (b)	Max 90 dB 8 hr		
	OSHA 1910.242 (b)	Max 30 PSI (2,1 bar) when blocked		

363

PISTOLA DI SOFFIAGGIO CON TUBO INOX DI SICUREZZA E DOPPIA ALIMENTAZIONE


BLOWGUN WITH STAINLESS SAFETY NOZZLE DOUBLE FEED

BLASPISTOLE MIT EDELSTAHL-SICHERHEITS ROHR DOPPELEINZUG

SOUFFLETTE AVEC EMBOUT DE SÉCURITÉ INOX AVEC DOUBLE ALIMENTATION

PISTOLA DE SOPLADO CON TUBO DE SEGURIDAD INOX DOBLE ALIMENTACION

PISTOLA DE AR COM BICO DE SEGURANÇA EM INOX ALIMENTAÇÃO DUPLA

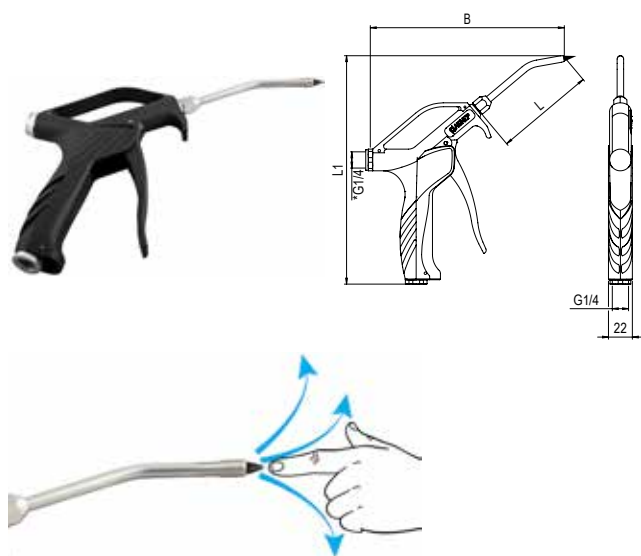

Code	L	L1	B	Pack.
00363 00 001	90	213.5	190.5	10

		min	max
	Temperature	- 10 °C	+ 80 °C

	Pressure	12 bar (1.2 MPa)
---	----------	---------------------

	383 NI/min @ 6 bar - 500 NI/min @ 8 bar		
---	---	--	--

	LAeq 78 dBA @ 6 bar		
---	---------------------	--	--

	LAeq 84 dBA @ 8 bar		
---	---------------------	--	--

	Forza su maniglia - Force on handle Kraft am Griff - Force sur la poignée Fuerza en el mango - Força no punho	19,8 N @ 6 bar	
---	---	----------------	--

	Forza di soffiaggio - Blowing force Kraft der Schlag - Force de soufflage Fuerza que sopla - Força de sopra	3,4 N @ 6 bar	
---	---	---------------	--

	2003/10/CE	Max 85 dBA	8 hr @ 6 bar 6 hr @ 8 bar
---	------------	------------	------------------------------

	OSHA 1910.95 (b)	Max 90 dB 8 hr	
---	------------------	----------------	--

	OSHA 1910.242 (b)	Max 30 PSI (2,1 bar) when blocked	
---	-------------------	-----------------------------------	--

Pistola comprensiva di tappo G1/4
Blowgun includes one bling plung G1/4
Blastpistole enthält ein Stopfen G1/4
Soufflette comprend un bouchon G1/4
Pistola de soplado incluye tapon G1/4
Pistola de ar inclui tampao G1/4

364

PISTOLA DI SOFFIAGGIO CON TUBO INOX DI SICUREZZA E DOPPIA ALIMENTAZIONE


BLOWGUN WITH STAINLESS SAFETY NOZZLE DOUBLE FEED

BLASPISTOLE MIT EDELSTAHL-SICHERHEIT'S ROHR DOPPELEINZUG

SOUFFLETTE AVEC EMBOUT DE SÉCURITÉ INOX AVEC DOUBLE ALIMENTATION

PISTOLA DE SOPLADO CON TUBO DE SEGURIDAD INOX DOBLE ALIMENTACION

PISTOLA DE AR COM BICO DE SEGURANÇA EM INOX ALIMENTAÇÃO DUPLA

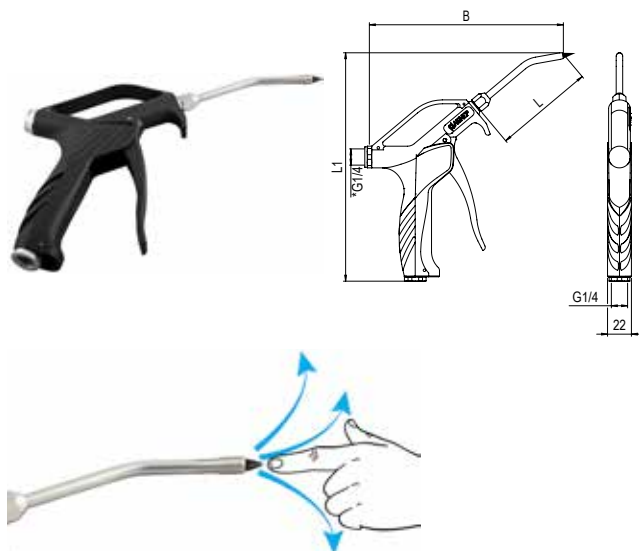

Code	L	L1	B	Pack.
00364 00 001	90	213.5	190.5	10

	min	max
--	-----	-----



Temperature

- 10 °C

+ 80 °C



Pressure

12 bar
(1.2 MPa)



200 NI/min @ 6 bar - 250 NI/min @ 8 bar



LAeq 73 dBA @ 6 bar



LAeq 78 dBA @ 8 bar



Forza su maniglia - Force on handle
Kraft am Griff - Force sur la poignée
Fuerza en el mango - Força no punho

19,8 N @ 6 bar



Forza di soffiaggio - Blowing force Kraft
der Schlag - Force de soufflage
Fuerza que sopla - Força de sopra

2,9 N @ 6 bar



2003/10/CE

Max 85 dBA

8 hr @ 6 bar

8 hr @ 8 bar



OSHA 1910.95 (b)

Max 90 dB 8 hr



OSHA 1910.242 (b)

Max 30 PSI (2,1 bar) when blocked



SUVA - CERTIFIED

Max 85 dBA @ 6 bar

Pistola comprensiva di tappo G1/4
Blowgun includes one bling plug G1/4
Blaspistole enthält ein Stopfen G1/4
Soufflette comprend un bouchon G1/4
Pistola de soplado incluye tapon G1/4
Pistola de ar inclui tampao G1/4

360

PISTOLA DI SOFFIAGGIO SENZA UGELLO


BLOWGUN WITHOUT NOZZLE

BLASPISTOLE OHNE ROHR

SOUFFLETTE SANS EMBOUT

PISTOLA DE SOPLADO SIN TUBO

PISTOLA DE AR SEM BICO

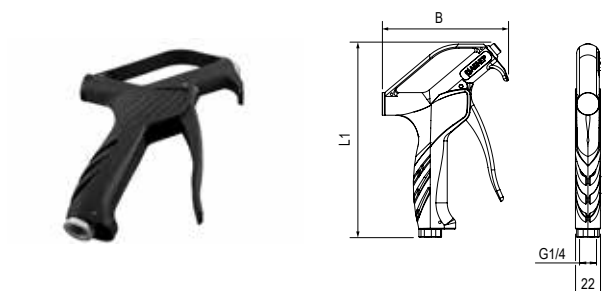

Code	L1	B	Pack.
00360 00 001	170.5	111.5	10

	min	max
--	-----	-----



Temperature

- 10 °C

+ 80 °C



Pressure

12 bar
(1.2 MPa)



Forza su maniglia - Force on handle
Kraft am Griff - Force sur la poignée
Fuerza en el mango - Força no punho

19,8 N @ 6 bar

CONFEZIONE STANDARD

STANDARD PACKAGING
STANDARDVERPACKUNG
CONDITIONNEMENT
EMBALAJE ESTÁNDAR
PACOTE PADRÃO



SERIE 300 - SERIE 360
312
UGELLO EFFETTO VENTURI (RICAMBIO)


VENTURI'S EFFECT NOZZLE (SPARE PART)

VENTURI DÜSE (ERSATZTEIL)

EMBOUT À EFFET VENTURI (RECHANGE)

BOQUILLA EFECTO VENTURI (RECAMBIO)

BICO COM EFEITO VENTURI (REPOSIÇÃO)



Code	L	D	Pack.
00312 00 001	55	17	1

314
UGELLO INOX (RICAMBIO)

STAINLESS STEEL NOZZLE (SPARE PART)

EDELSTAHL DÜSE (ERSATZTEIL)

EMBOUT EN ACIER INOXYDABLE (RECHANGE)

BOQUILLA DE ACERO INOXIDABLE (RECAMBIO)

BICO DE AÇO INOXIDÁVEL (REPOSIÇÃO)



Code	L	Pack.
00314 00 001	90	1
00314 00 002	200	1
00314 00 003	290	1

Ogni ugello è completo di dado e ogiva.

Every nozzle is supplied with nut and olive.

Jede düse ist komplett mit mutter und klemmring.

L'embout est livré avec un écrou et une bague

Cada boquilla está completa de tuerca y bicono.

Todo bico é fornecido completo, com porca e bucha para montagem.

315
UGELLO INOX DI SICUREZZA (RICAMBIO)

STAINLESS STEEL SAFETY NOZZLE (SPARE PART)

EDELSTAHL-SICHERHEITS DÜSE (ERSATZTEIL)

EMBOUT DE SÉCURITÉ ACIER INOXYDABLE (RECHANGE)

BOQUILLA DE SEGURIDAD ACERO INOXIDABLE (RECAMBIO)

BICO DE SEGURANÇA DE AÇO INOXIDÁVEL (REPOSIÇÃO)



Code	L	Pack.
00315 00 001	90	1
00315 00 002	200	1
00315 00 003	290	1

Ogni ugello è completo di dado e ogiva.

Every nozzle is supplied with nut and olive.

Jede düse ist komplett mit mutter und klemmring.

L'embout est livré avec un écrou et une bague

Cada boquilla está completa de tuerca y bicono.

Todo bico é fornecido completo, com porca e bucha para montagem.