

Quick Couplings

1/4 MULTISOCKET



80190 Series

Pag. 17.3 - 17.7

STAINLESS STEEL AISI 316 L MULTISOCKET



83190 Series

Pag. 17.8 - 17.9

3/8 MULTISOCKET



80190 Series

Pag. 17.10 - 17.11

3/8 B-SOCKET - TOP FLOW



80720 Series

Pag. 17.12 - 17.13

AC MINI



80110 Series

Pag. 17.14 - 17.15

1/4 INDUSTRIAL INTERCHANGE



80120 Series

Pag. 17.16 - 17.17

3/8 INDUSTRIAL INTERCHANGE



80130 Series

Pag. 17.18 - 17.19

Safety Quick Couplings

SAFETY COUPLERS



80620 Series

Pag. 17.21 - 17.22

BUTTON SAFETY COUPLERS



8B120 Series

Pag. 17.23 - 17.24

WB 360 Series

BLOW GUNS




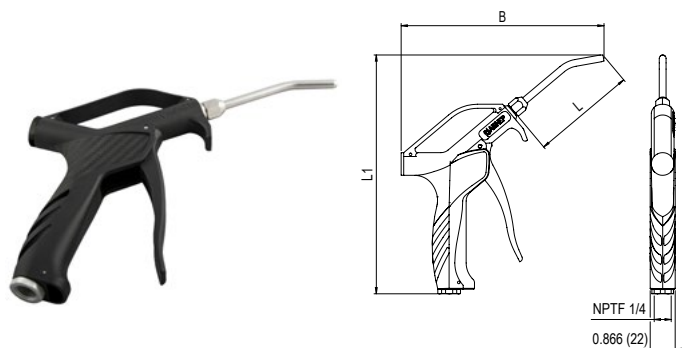
WB 360 Series

Pag. 17.27

BLOW GUNS



WB 360 Series

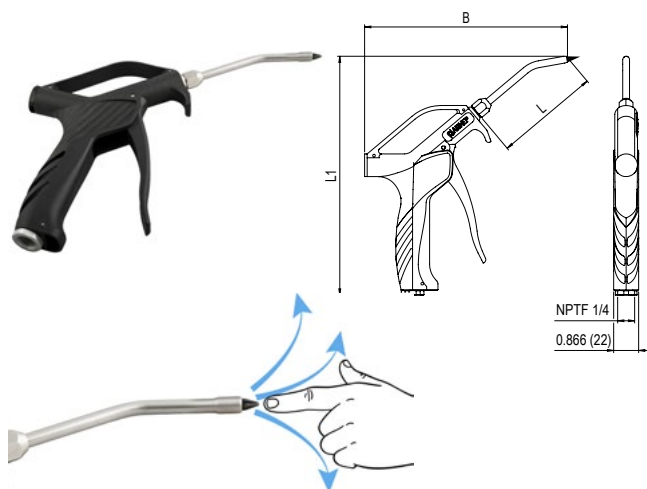

TECHNICAL CHARACTERISTICS

WB 361
BLOW GUN WITH STAINLESS STEEL NOZZLE

Media

- Compressed Air
- Water


Component Parts and Materials

- 1 Technopolymer Body
- 2 Anodized aluminum Back Connection
- 3 Nickel-plated Brass Locking Nut
- 4 Stainless Steel AISI 304 Nozzle

Code	L	L1	B
WB361 00 001	90	8.287 (210,5)	7.047 (179)
		min	max
 Temperature	- 10 °C (14 F) + 80 °C (176 F)		
 Pressure	12 bar (174 Psi) (1.2 MPa)		
 433 NI/min @ 6 bar (87 Psi) - 533 NI/min @ 8 bar (116 Psi)			
 LAeq 89 dBA @ 6 bar (87 Psi)			
 LAeq 90 dBA @ 8 bar (116 Psi)			
 Force on handle	19,8 N @ 6 bar (87 Psi)		
 Blowing force	3,7 N @ 6 bar (87 Psi)		
 2003/10/CE	Max 85 dBA	3 hr @ 6 bar (87 Psi) 3 hr @ 8 bar (116 Psi)	
 OSHA 1910.95 (b)	Max 90 dB 8 hr (116 Psi)		

WB 362
BLOW GUN WITH STAINLESS STEEL NOZZLE


Code	L	L1	B
WB362 00 001	90	8.287 (210,5)	7.303 (185,5)
		min	max
 Temperature	- 10 °C (14 F) + 80 °C (176 F)		
 Pressure	12 bar (174 Psi) (1.2 MPa)		
 383 NI/min @ 6 bar (87 Psi) - 500 NI/min @ 8 bar (116 Psi)			
 LAeq 78 dBA @ 6 bar (87 Psi)			
 LAeq 84 dBA @ 8 bar (116 Psi)			
 Force on handle	19,8 N @ 6 bar (87 Psi)		
 Blowing force	3,4 N @ 6 bar (87 Psi)		
 2003/10/CE	Max 85 dBA	8 hr @ 6 bar (87 Psi) 6 hr @ 8 bar (116 Psi)	
 OSHA 1910.95 (b)	Max 90 dB 8 hr		
 OSHA 1910.242 (b)	Max 2,1 bar (30 Psi) when blocked		