

Adapters

								
82200N Pg. 14.4	82201 Pg. 14.4	82301 Pg. 14.4	82205N Pg. 14.4	82241N Pg. 14.5	82242N Pg. 14.5	82280N Pg. 14.5	82300N Pg. 14.5	82320 Pg. 14.5
								
82400N Pg. 14.6	82510N Pg. 14.6	82520N Pg. 14.6	82600 Pg. 14.6	82620N Pg. 14.6	82640N Pg. 14.7	82690 Pg. 14.7	81410 Pg. 14.8	81420 Pg. 14.8
								
81430 Pg. 14.8	51410 Pg. 14.9	51420 Pg. 14.9	51430 Pg. 14.9	51440 Pg. 14.9	62541 Pg. 14.10	82700 Pg. 14.10	82710 Pg. 14.10	82720 Pg. 14.10
								
82730 Pg. 14.11	7105 Pg. 14.11	7115 Pg. 14.11						

Click here to view the **Adapters Series** on our Website



Tubes Series

						
NYLON INCH Pg. 14.13	NYLON METRIC Pg. 14.14	PU INCH Pg. 14.15	PU METRIC Pg. 14.16	LLDPE INCH Pg. 14.17	LLDPE METRIC Pg. 14.18	1750 Pg. 14.18

Click here to view the **Tubes Series** on our Website



NICKEL PLATED BRASS ADAPTERS

Adapters Series





TECHNICAL CHARACTERISTICS



Standard Reference


1907/2006
REACH✓

2011/65/CE
RoHS✓

PED
2014/68/UE

ISO
14743:2020

SILICON
FREE

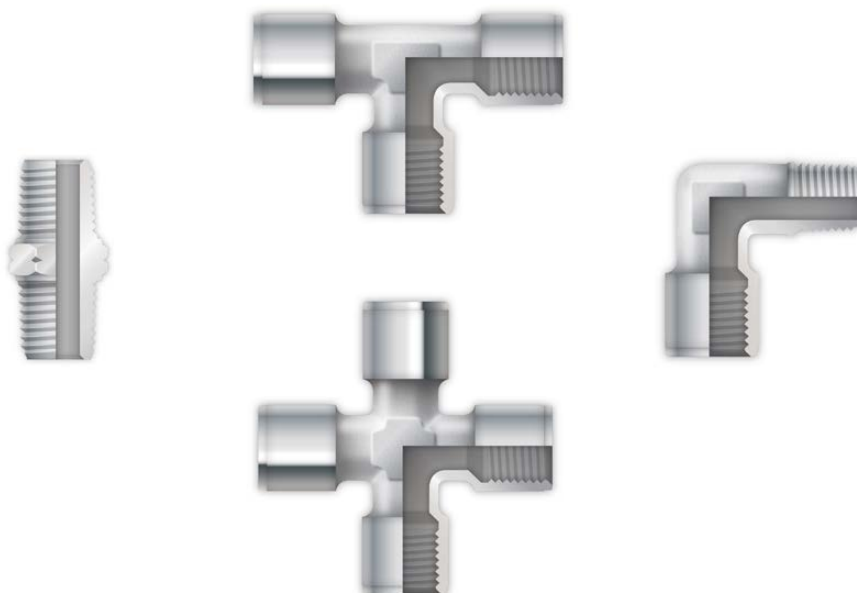

Maximum temperature

572 °F
300 °C



Component Parts and Materials

These fittings are made in **OT UNI EN 12164/5 CW 614/7N** and undergo a nickel-plating process. All other materials will be specified in catalog.



Pressure Rating

Vacuum ~ see data chart
-0.99 bar ~ see data chart
-0.099 MPa ~ see data chart



Size	Maximum pressure advised
1/8"	2175 PSI / 150 bar / 15 MPa
1/4"	1450 PSI / 100 bar / 10 MPa
3/8"	1080 PSI / 74 bar / 7.4 MPa
1/2"	725 PSI / 50 bar / 5 MPa



Connection Tubes

Tubes and general fittings.



Threads

Tapered gas in conformity with ISO7.1, BS 21, DIN 2999.
Parallel gas in conformity with ISO 228 Class A.
Metric in conformity with ISO R/262.
NPTF in conformity with ANSI B1.20.5




Media

- Compressed air
- Water
- Oils
- Vacuum
- General fluids for pneumatic, hydraulic and oildynamic facilities.

82200N


HEX NIPPLE



Code	Usa Ref	A NPTF	H	L	CH	Pack
82200 00 01 02 NB	82200N-02	1/8	.335 (8,5)	.846 (21,5)	.472 (12)	10
82200 00 01 03 NB	82200N-04	1/4	.512 (13)	1.220 (31)	.551 (14)	10
82200 00 01 04 NB	82200N-06	3/8	.512 (13)	1.220 (31)	.748 (19)	10
82200 00 01 05 NB	82200N-08	1/2	.669 (17)	1.575 (40)	.866 (22)	10

82201

Nipple - Male x Male




Code	Usa Ref	A	A1	B	C	L	CH1	CH2	Pack
82201 00 003	82201-02-04	1/8	1/4	.280 (7)	.330 (8,5)	1.170 (29,7)	.550 (14)	.630 (16)	10
82201 00 001	82201-04-04	1/4	1/4	.330 (8,5)	.330 (8,5)	1.260 (32)	.630 (16)	.630 (16)	10
82201 00 004	82201-04-06	1/4	3/8	.330 (8,5)	.350 (9)	1.310 (33,2)	.630 (16)	.780 (20)	10
82201 00 005	82201-06-06	3/8	3/8	.350 (9)	.350 (9)	1.310 (33,2)	.780 (20)	.780 (20)	10
82201 00 002	82201-04-08	1/4	1/2	.330 (8,5)	.350 (9)	1.300 (33,1)	.630 (16)	.820 (21)	10
82201 00 006	82201-08-08	1/2	1/2	.410 (10,5)	.350 (9)	1.320 (33,6)	.820 (21)	.820 (21)	10

	min	max
Temperature	- 4 °F	+ 176 °F
Pressure	- 14.35 psi (-0.99 bar)	+ 217.5 psi (15 bar)

82301

NIPPLE - MALE X FEMALE




Code	Part No.	A	A1 NPTF	B	L	CH1	CH2	Pack
82301 00 004	82301N-02-04	1/8	1/4	.276 (7)	1.366 (36,7)	.551 (14)	.630 (16)	10
82301 00 005	82301N-02-06	1/8	3/8	.276 (7)	1.526 (38,75)	.630 (16)	.787 (20)	10
82301 00 006	82301N-02-08	1/8	1/2	.276 (7)	1.684 (42,75)	.630 (16)	.945 (24)	10
82301 00 007	82301N-04-02	1/4	1/8	.335 (8,5)	1.388 (35,25)	.630 (16)	.630 (16)	10
82301 00 001	82301N-04-04	1/4	1/4	.335 (8,5)	1.544 (39,2)	.630 (16)	.630 (16)	10
82301 00 002	82301N-04-06	1/4	3/8	.335 (8,5)	1.424 (38,7)	.630 (16)	.787 (20)	10
82301 00 009	82301N-04-08	1/4	1/2	.335 (8,5)	1.684 (42,75)	.630 (16)	.945 (24)	10
82301 00 003	82301N-06-06	3/8	3/8	.354 (9)	1.446 (36,7)	.787 (20)	.787 (20)	10
82301 00 008	82301N-06-08	3/8	1/2	.354 (9)	1.605 (40,75)	.787 (20)	.945 (24)	10
82301 00 010	82301N-06-12	3/8	3/4	.354 (9)	1.525 (41,25)	.787 (20)	1.260 (32)	10
82301 00 011	82301N-08-08	1/2	1/2	.413 (10,5)	1.703 (43,25)	.827 (21)	.945 (24)	10
82301 00 012	82301N-08-12	1/2	3/4	.413 (10,5)	1.723 (43,75)	.827 (21)	1.260 (32)	10

	min	max
Temperature	- 4 °F	+ 176 °F
Pressure	- 14.35 psi (-0.99 bar)	+ 217.5 psi (15 bar)

82205N


NIPPLE



Code	Part No.	A BSPT	B NPTF	L	CH	Pack
82205 00 01 2W NB	82205N-02-02	1/8	1/8	.807 (20,5)	.472 (12)	10
82205 00 01 6W NB	82205N-04-04	1/4	1/4	1.142 (29)	.551 (14)	10
82205 00 01 AB NB	82205N-06-06	3/8	3/8	1.161 (29,5)	.708 (18)	10
82205 00 01 AG NB	82205N-08-08	1/2	1/2	1.437 (36,5)	.866 (22)	10
82205 00 01 AN NB	82205N-12-12	3/4	3/4	1.594 (40,5)	1.063 (27)	10

82241N


ADAPTER FEMALE - MALE NPTF



Code	Usa Ref	A	B BSPP	H	L	CH	Pack
82241 00 01 8K NB	82241N-32-M5	10/32 UNF	M5	.177 (4,5)	.472 (12)	.315 (8)	10
82241 00 01 2W NB	82241N-02-02	1/8	1/8	.335 (8,5)	.768 (19,5)	.551 (14)	10
82241 00 01 6W NB	82241N-04-04	1/4	1/4	.512 (13)	1.063 (27)	.669 (17)	10
82241 00 01 AB NB	82241N-06-06	3/8	3/8	.512 (13)	1.102 (28)	.866 (22)	10
82241 00 01 AG NB	82241N-08-08	1/2	1/2	.669 (17)	1.359 (34,5)	1.063 (27)	10

82242N


ADAPTER - FEMALE NPTF - MALE G THREAD



Code	Usa Ref	A BSPP	B NPTF	H	L	CH	Pack
82242 00 01 2W NB	82242N-02	1/8	1/8	.236 (6)	.669 (17)	.551 (14)	10
82242 00 01 6W NB	82242N-04	1/4	1/4	.315 (8)	.906 (23)	.669 (17)	10
82242 00 01 AB NB	82242N-06	3/8	3/8	.354 (9)	.945 (24)	.866 (22)	10
82242 00 01 AG NB	82242N-08	1/2	1/2	.472 (12)	1.240 (31,5)	1.063 (27)	10

82280N


REDUCER FEMALE - MALE NPTF



Code	Usa Ref	A NPTF	B	H	L	CH	Pack
82280 00 01 0K NB	82280N-02-32	1/8	10/32 UNF	.335 (8,5)	.571 (14,5)	.472 (12)	10
82280 00 01 5W NB	82280N-04-02	1/4	1/8 NPTF	.512 (13)	.748 (19)	.551 (14)	10
82280 00 01 9W NB	82280N-06-02	3/8	1/8 NPTF	.512 (13)	.768 (19,5)	.748 (19)	10
82280 00 01 AA NB	82280N-06-04	3/8	1/4 NPTF	.512 (13)	.906 (23)	.748 (19)	10
82280 00 01 AE NB	82280N-08-04	1/2	1/4 NPTF	.669 (17)	.965 (24,5)	.866 (22)	10
82280 00 01 AF NB	82280N-08-06	1/2	3/8 NPTF	.669 (17)	.965 (24,5)	.866 (22)	10

82300N


COUPLING FEMALE NPTF



Code	Usa Ref	A NPTF	L	CH	Pack
82300 00 01 02 NB	82300N-02	1/8	.748 (19)	.551 (14)	10
82300 00 01 03 NB	82300N-04	1/4	1.063 (27)	.669 (17)	10
82300 00 01 04 NB	82300N-06	3/8	1.063 (27)	.866 (22)	10
82300 00 01 05 NB	82300N-08	1/2	1.378 (35)	1.063 (27)	10

82320


COUPLING FEMALE



Code	Usa Ref	A	B	D	L	CH	Pack
82320 00 002	82320-02	1/8	.217 (5,5)	.394 (10)	.315 (8)	.197 (5)	10
82320 00 003	82320-04	1/4	.275 (7)	.551 (14)	.394 (10)	.236 (6)	10
82320 00 004	82320-06	3/8	.295 (7,5)	.669 (17)	.433 (11)	.315 (8)	10
82320 00 005	82320-08	1/2	.354 (9)	.827 (21)	.512 (13)	.394 (10)	10

82400N


TEE FEMALE NPTF



Code	Usa Ref	A NPTF	M	CH	Pack
82400 00 01 02 NB	82400N-02	1/8	.669 (19,5)	.472 (12)	10
82400 00 01 03 NB	82400N-04	1/4	.906 (26)	.512 (13)	10
82400 00 01 04 NB	82400N-06	3/8	.945 (28,5)	.630 (16)	10
82400 00 01 05 NB	82400N-08	1/2	1.240 (33,5)	.787 (20)	10

82510N


Elbow - Female NPTF



Code	Usa Ref	A NPTF	M	CH	Pack
82510 00 01 02 NB	82510N-02	1/8	.846 (21,5)	.433 (11)	10
82510 00 01 03 NB	82510N-04	1/4	1.083 (27,5)	.512 (13)	10
82510 00 01 04 NB	82510N-06	3/8	1.161 (29,5)	.669 (17)	10
82510 00 01 05 NB	82510N-08	1/2	1.339 (34)	.787 (20)	10

82520N


Elbow - Female - Male NPTF



Code	Usa Ref	A NPTF	H	M1	M2	CH	Pack
82520 00 01 02 NB	82520N-02	1/8	.335 (8,5)	.827 (21)	.748 (19)	.433 (11)	10
82520 00 01 03 NB	82520N-04	1/4	.512 (13)	1.083 (27,5)	1.004 (25,5)	.512 (13)	10
82520 00 01 04 NB	82520N-06	3/8	.512 (13)	1.161 (29,5)	1.083 (27,5)	.669 (17)	10
82520 00 01 05 NB	82520N-08	1/2	.669 (17)	1.339 (34)	1.260 (32)	.787 (20)	10

82600


CENTRAL MALE Y 90°



Code	Part No.	A NPTF	H	L	CH	Pack
82600 000 105 NB	82600 000 105 NB	1/2	.669 (17)	2.291 (58,2)	1.024 (26)	10

82620N


Cross - Female NPTF



Code	Usa Ref	A NPTF	M	CH	Pack
82620 00 01 02 NB	82620N-02	1/8	.787 (20)	.433 (11)	10
82620 00 01 03 NB	82620N-04	1/4	1.063 (27)	.512 (13)	10
82620 00 01 04 NB	82620N-06	3/8	1.142 (29)	.669 (17)	10

82640

Aluminum Distribution Block - Female

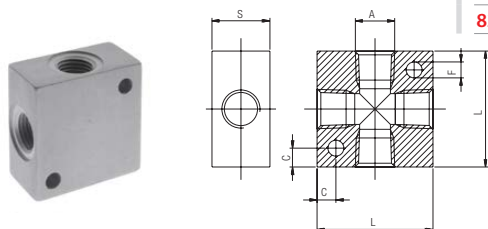

Code	Usa Ref	A NPTF	L	S	F	C	Pack
82640 00 11 02 AG	82640-02	1/8	.984 (25)	.630 (16)	.177 (4,5)	.169 (4,5)	10
82640 00 11 03 AG	82640-04	1/4	1.575 (40)	.787 (20)	.217 (5,5)	.256 (6,5)	10
82640 00 11 04 AG	82640-06	3/8	1.969 (50)	.984 (25)	.217 (5,5)	.295 (7,5)	10
82640 00 11 05 AG	82640-08	1/2	1.969 (50)	1.181 (30)	.217 (5,5)	.295 (7,5)	10

NPTF / BSPP BANJO STEM ASSEMBLIES

Examples of various banjo stems with single and double banjo bodies

BANJO STEM

Part No.

81410

81420


81430



NYLON WASHER





BANJO BODY INCH OR METRIC



NYLON WASHER




ADAPTER


Single
banjo stem

Double
banjo stem

Triple
banjo stem

With nylon banjo body remove the washer.

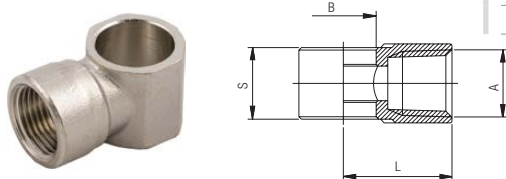82690


SINGLE BANJO BODY FEMALE



Code	Usa Ref	A	B	L	S	CH	Pack
82690 00 01 26 NB	82690-32	10/32	.240 (6.1)	.570 (14.5)	.484 (12.3)	N/A	10
82690 00 01 02 NB	82690-02	1/8	.394 (10)	.649 (16.5)	.590 (15)	.551 (14)	10
82690 00 01 03 NB	82690-04	1/4	.531 (13.5)	.866 (22)	.669 (17)	.708 (18)	10
82690 00 01 04 NB	82690-06	3/8	.688 (17.5)	1.043 (26.5)	.787 (20)	.827 (21)	10

81410

SINGLE BANJO STEM




NPTF

UNF

Code	Usa Ref	A	B	C	L	CH	Pack
81410 00 011	81410-32	10/32 UNF	.177 (4,5)	.492 (15,5)	1.200 (30,5)	.315 (8)	10
81410 00 012	81410-02	1/8	.334 (8,5)	.591 (15)	1.653 (42)	.551 (14)	10
81410 00 013	81410-04	1/4	.511 (13)	.669 (17)	2.047 (52)	.669 (17)	10
81410 00 014	81410-06	3/8	.511 (13)	.787 (20)	2.106 (53,5)	.748 (19)	10

81420

DOUBLE BANJO STEM




NPTF

Code	Usa Ref	A NPTF	B	C	L	CH	Pack
81420 00 012	81420-02	1/8	.334 (8,5)	.591 (15)	2.283 (58)	.551 (14)	10
81420 00 013	81420-04	1/4	.511 (13)	.669 (17)	2.755 (70)	.669 (17)	10
81420 00 014	81420-06	3/8	.511 (13)	.787 (20)	3.031 (77)	.748 (19)	10

81430

TRIPLE BANJO STEM

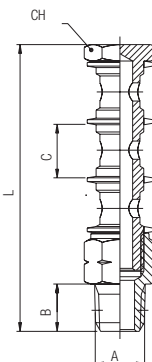


NPTF

Code	Usa Ref	A NPTF	B	C	L	CH	Pack
81430 00 012	81430-02	1/8	.334 (8,5)	.591 (15)	2.913 (74)	.551 (14)	10
81430 00 013	81430-04	1/4	.511 (13)	.669 (17)	3.464 (88)	.669 (17)	10
81430 00 014	81430-06	3/8	.511 (13)	.787 (20)	3.897 (99)	.748 (19)	10

51410

BANJO SCREW SINGLE

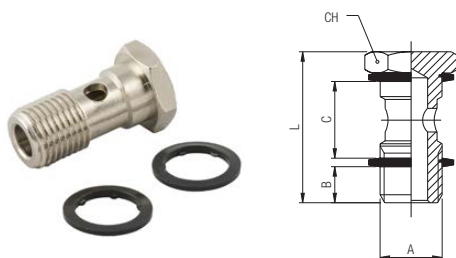


Code	Usa Ref	A BSPP	B	C	L	CH	Pack.
51410 00 011	51410-M5	M5	.157 (4)	.02 (12.5)	.866 (22)	.315 (8)	10
51410 00 012	51410-M6	M6	.197 (5)	.02 (12.5)	.906 (23)	.315 (8)	10
51410 00 013	51410-1/8	1/8	.236 (6)	.591 (15)	1.102 (28)	.551 (14)	10
51410 00 014	51410-1/4	1/4	.315 (8)	.669 (17)	1.26 (32)	.669 (17)	10
51410 00 015	51410-3/8	3/8	.354 (9)	.787 (20)	1.417 (36)	.748 (19)	10
51410 00 016	51410-1/2	1/2	.394 (10)	.945 (24)	1.654 (42)	.945 (24)	10
51410 00 017	51410-M12X1,5	*M12x1.5	.315 (8)	.669 (17)	1.26 (32)	.669 (17)	10

This item will be supplied with the PA66 washers (ART. 1610).

* With this banjo SCREW using 1/4 orienting banjo body.

51420

BANJO SCREW DOUBLE

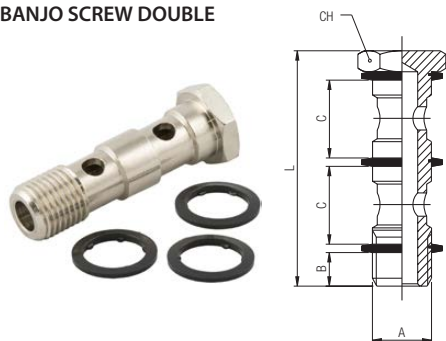


Code	Usa Ref	A BSPP	B	C	L	CH	Pack.
51420 00 011	51420-1/8	1/8	.236 (6)	.591 (15)	.072 (44,5)	.551 (14)	10
51420 00 012	51420-1/4	1/4	.315 (8)	.669 (17)	.082 (50,5)	.669 (17)	10
51420 00 013	51420-3/8	3/8	.354 (9)	.787 (20)	2.283 (58)	.748 (19)	10
51420 00 014	51420-1/2	1/2	.394 (10)	.945 (24)	2.677 (68)	.945 (24)	10
51420 00 015	51420-M12X1,5	*M12x1.5	.315 (8)	.669 (17)	.082 (50,5)	.669 (17)	10

This item will be supplied with the PA66 washers (ART. 1610).

* With this banjo SCREW using 1/4 orienting banjo body.

51430

BANJO SCREW TRIPLE

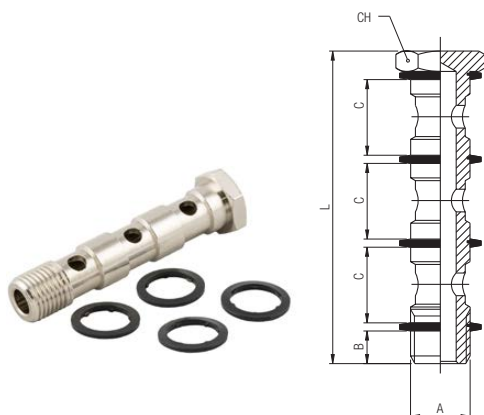

Code	Usa Ref	A BSPP	B	C	L	CH	Pack.
51430 00 011	51430-1/8	1/8	.236 (6)	.591 (15)	2.402 (61)	.551 (14)	10
51430 00 012	51430-1/4	1/4	.315 (8)	.669 (17)	2.717 (69)	.669 (17)	10
51430 00 013	51430-3/8	3/8	.354 (9)	.787 (20)	3.15 (80)	.748 (19)	10
51430 00 014	51430-1/2	1/2	.394 (10)	.945 (24)	3.701 (94)	.945 (24)	10

This item will be supplied with the PA66 washers (ART. 1610).

51440

MALE - FEMALE BANJO SCREW SINGLE




Code	Usa Ref	A	A1	B	C	D	L	CH	Pack.
51440 00 001	51440-1/8	1/8	1/8	.236 (6)	.591 (15)	.335 (8.5)	1.358 (34.5)	.551 (14)	10
51440 00 002	51440-1/4	1/4	1/4	.315 (8)	.669 (17)	.433 (11)	1.594 (40.5)	.669 (17)	10
51440 00 003	51440-3/8	3/8	3/8	.354 (9)	.787 (20)	.472 (12)	1.752 (45.5)	.748 (19)	10

This item will be supplied with the PA66 washers (ART. 1610).

62541

SILENCER WITH MICRO GRID OF STAINLESS STEEL

NPT

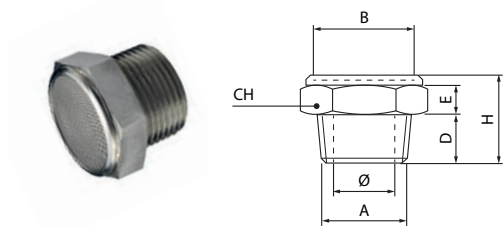

Code	Usa Ref	A (NPT)	Ø	B	D	E	H	CH	Pack.
62541 00 001	62541-02	1/8	.236 (6)	.354 (9)	.276 (7)	.157 (4)	.551 (14)	.551 (14)	10
62541 00 002	62541-04	1/4	.315 (8)	.511 (13)	.433 (11)	.157 (4)	.709 (18)	.669 (17)	10
62541 00 003	62541-06	3/8	.472 (12)	.709 (18)	.433 (11)	.197 (5)	.709 (18)	.866 (22)	10
62541 00 004	62541-08	1/2	.591 (15)	.886 (22.5)	.591 (15)	.276 (7)	.984 (25)	1.063 (27)	10
62541 00 005	62541-12	3/4	.787 (20)	1.102 (28)	.630 (16)	.354 (9)	1.063 (27)	1.260 (32)	10
62541 00 006	62541-16	1	1.024 (26)	1.339 (34)	.748 (19)	.433 (11)	1.260 (32)	1.614 (41)	10

min max



Temperature

- 58 °F + 752 °F



Pressure

10 bar




Filtration threshold

70 µm

82700

HEXAGONAL HEAD SILENCER

NPT

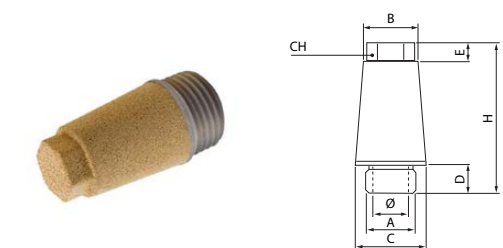

Code	Usa Ref	A (NPT)	Ø	B	C	D	E	H	CH	Pack.
82700 00 001	82700-02	1/8	.276 (7)	.386 (9.8)	.453 (11.5)	.177 (4.5)	.157 (4)	.886 (22.5)	.315 (8)	10
82700 00 002	82700-04	1/4	.374 (9.5)	.492 (12.5)	.591 (15)	.236 (6)	.157 (4)	1.102 (28)	.394 (10)	10
82700 00 003	82700-06	3/8	.492 (12.5)	.630 (16)	.748 (19)	.354 (9)	.197 (5)	1.496 (38)	.511 (13)	10
82700 00 004	82700-08	1/2	.610 (15.5)	.768 (19.5)	.906 (23)	.433 (11)	.256 (6.5)	1.811 (46)	.591 (15)	10

min max



Temperature

- 4 °F + 302 °F



Pressure

10 bar




Filtration threshold

50 µm

82710

SILENCER WITH RIVETED SINTERED SPHERICAL BRONZE TABLET

NPT

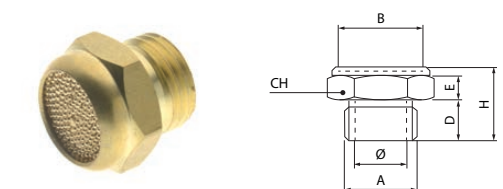

Code	Usa Ref	A (NPT)	Ø	B	D	E	H	CH	Pack.
82710 00 001	82710-02	1/8	.236 (6)	.354 (9)	.291 (7.4)	.157 (4)	.472 (12)	.511 (13)	10
82710 00 002	82710-04	1/4	.335 (8.5)	.433 (11)	.429 (10.9)	.197 (5)	.630 (16)	.630 (16)	10
82710 00 003	82710-06	3/8	.453 (11.5)	.551 (14)	.429 (10.9)	.197 (5)	.669 (17)	.748 (19)	10
82710 00 004	82710-08	1/2	.591 (15)	.748 (19)	.535 (13.6)	.236 (6)	.709 (18)	.945 (24)	10
82710 00 005	82710-12	3/4	.787 (20)	.984 (25)	.535 (13.6)	.236 (6)	.748 (19)	1.181 (30)	10
82710 00 006	82710-16	1	1.024 (26)	1.220 (31)	.614 (15.6)	.236 (6)	.787 (20)	1.417 (36)	10

min max



Temperature

- 4 °F + 302 °F



Pressure

10 bar




Filtration threshold

120 µm

82720

SILENCER-DOME WIRE AISI 304

NPT

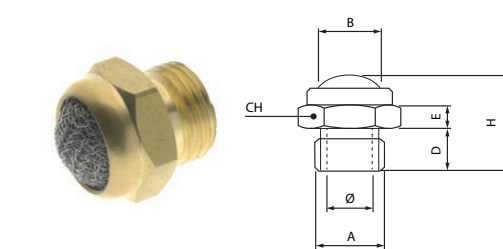

Code	Usa Ref	A (NPT)	Ø	B	D	E	H	CH	Pack.
82720 00 001	82720-02	1/8	.236 (6)	.374 (9.5)	.236 (6)	.157 (4)	.591 (15)	.511 (13)	10
82720 00 002	82720-04	1/4	.335 (8.5)	.433 (11)	.315 (8)	.197 (5)	.709 (18)	.630 (16)	10
82720 00 003	82720-06	3/8	.453 (11.5)	.571 (14.5)	.315 (8)	.197 (5)	.787 (20)	.748 (19)	10
82720 00 004	82720-08	1/2	.591 (15)	.748 (19)	.394 (10)	.236 (6)	.866 (22)	.945 (24)	10
82720 00 005	82720-12	3/4	.787 (20)	.945 (24)	.394 (10)	.236 (6)	1.024 (26)	1.181 (30)	10
82720 00 006	82720-16	1	1.024 (26)	1.220 (31)	.394 (10)	.236 (6)	1.102 (28)	1.417 (36)	10

min max



Temperature

- 4 °F + 302 °F



Pressure

10 bar




Filtration threshold

70 µm

82730

CONICAL SILENCER

NPT




Code	Usa Ref	A (NPT)	Ø	B	D	E	H	CH	Pack.
82730 00 001	82730-02	1/8	.236 (6)	.315 (8)	.335 (8.5)	.157 (4)	1.024 (26)	.511 (13)	10
82730 00 002	82730-04	1/4	.335 (8.5)	.354 (9)	.413 (10.5)	.197 (5)	1.339 (34)	.630 (16)	10
82730 00 003	82730-06	3/8	.453 (11.5)	.472 (12)	.512 (13)	.197 (5)	1.614 (41)	.748 (19)	10
82730 00 004	82730-08	1/2	.591 (15)	.630 (16)	.394 (18)	.236 (6)	1.811 (46)	.945 (24)	10
82730 00 005	82730-12	3/4	.787 (20)	.827 (21)	1.004 (25.5)	.236 (6)	2.205 (56)	1.181 (30)	10
82730 00 006	82730-16	1	1.022 (26)	1.043 (26.5)	1.201 (30.5)	.236 (6)	2.598 (66)	1.417 (36)	10

	min	max
Temperature	- 4 °F	+ 302 °F
Pressure		10 bar
Filtration threshold		50 µm

82705

POROUS POLYETHYLENE SILENCER




Code	Usa Ref	A	F	H	D	Pack.
82705 00 001	82705-02	1/8	.276 (7)	1.319 (33.5)	.512 (13)	10
82705 00 002	82705-04	1/4	.315 (8)	1.575 (40)	.669 (17)	10
82705 00 003	82705-06	3/8	.433 (11)	2.559 (65)	.984 (25)	10
82705 00 004	82705-08	1/2	.433 (11)	2.795 (71)	.984 (25)	10
82705 00 005	82705-12	3/4	.610 (15.5)	5.433 (138)	1.457 (37)	10
82705 00 006	82705-16	1"	.748 (19)	6.181 (157)	1.870 (47.5)	5

	min	max
Temperature	- 4 °F	+ 176 °F
Pressure		10 bar
Filtration threshold		50 µm

82715

POROUS POLYETHYLENE RESTRICTOR SILENCER



Code	Usa Ref	A	F	H	CH1	CH2	Pack.
82715 00 001	82715-02	1/8	.197 (5)	.807 (20.5)	.512 (13)	.098 (2.5)	10
82715 00 002	82715-04	1/4	.236 (6)	1.142 (29)	.591 (15)	.157 (4)	10
82715 00 003	82715-06	3/8	.276 (7)	1.496 (38)	.787 (20)	.236 (6)	10
82715 00 004	82715-08	1/2	.335 (8.5)	1.969 (50)	.984 (25)	.315 (8)	10

	min	max
Temperature	- 4 °F	+ 176 °F
Pressure		10 bar
Filtration threshold		50 µm

TEST GRAPH 7105 1/8 - 1/4 - 3/8 - 5 BAR PRESSURE

