

FRL Mini Series

								
N010 Mini Pag. 21.4	N015 Mini Pag. 21.6	N020 Mini Pag. 21.8	N070 Mini Pag. 21.10	N080 Mini Pag. 21.12	N030 Mini Pag. 21.14	N040 Mini Pag. 21.16	N100 Mini Pag. 21.18	N400 Mini Pag. 21.20
 Accessories Pag. 21.22								

FRL Evo Series

								
N010 Pag. 21.29	N015 Pag. 21.31	N016 Pag. 21.33	N020 Pag. 21.35	N022 Pag. 21.37	N025 Pag. 21.40	N030 Pag. 21.42	N040 Pag. 21.44	N050 Pag. 21.46
						 Accessories Pag. 21.62		
N051 Pag. 21.50	N052 Pag. 21.52	N060 Pag. 21.54	N090 Pag. 21.56	N100 Pag. 21.58	N400 Pag. 21.60			

Click here to view the **FRL Mini Series** on our Website



Click here to view the **FRL Evo Series** on our Website



ARI REGULATOR UNIT

FRL Series




TECHNICAL CHARACTERISTICS FRL 1-2-3




Basic Assembly

The "FRL Evo" line is modular and the connection between each unit is simplified thanks to the connection brackets. The assembly of the modules may change according to individual use. To operate, make sure the shut off valve is in the first position and the soft start valve is in the last. There is an arrow on every unit that indicates the correct direction of air flow.

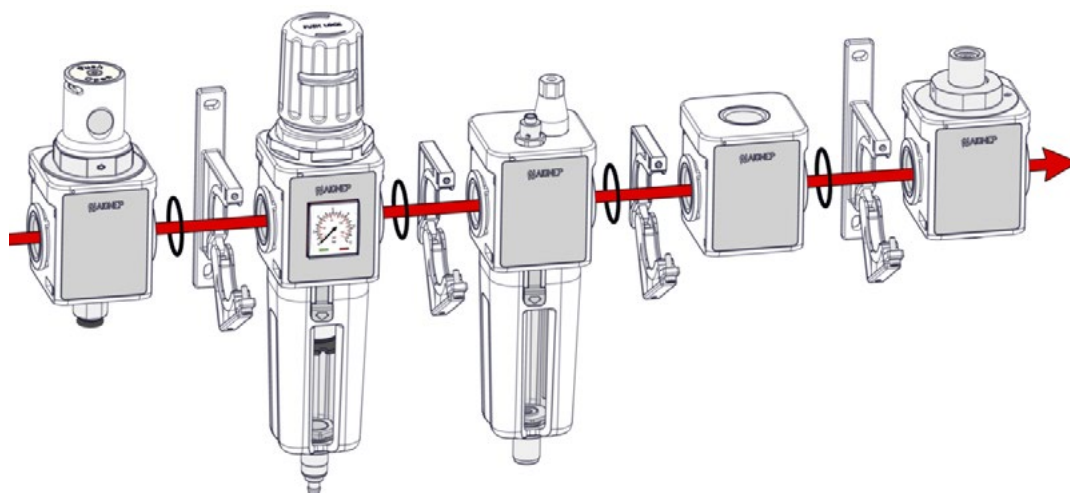


Mounting Instructions

Two types of mounting brackets are available for the FRL Evo Series to give the end user different mounting options.

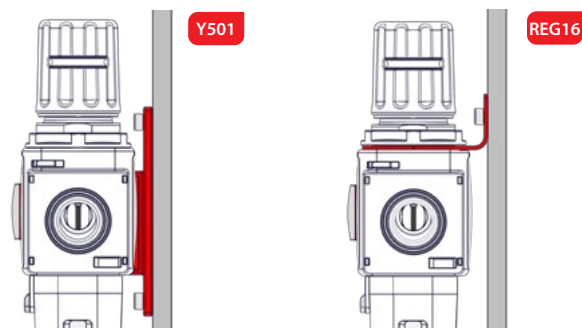

Removing the Bowl


To release to bowl, press down the button with the arrow and rotate the bowl clock-wise as shown in the drawing, then pull downward. The windows on the bowl allow you to see the level of condensation in the filter, or the amount of oil in the lubricator.

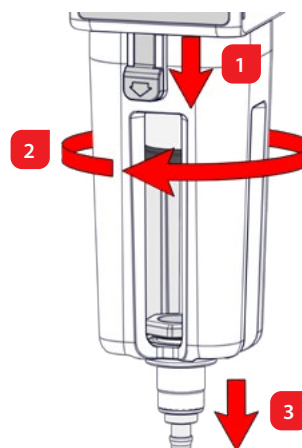




Shut Off Valves

3 versions of the Shut Off Valves are available: There are 3 available versions for the shut off valve manual with lock and anti-tampering system, pneumatic and electro-pneumatic.

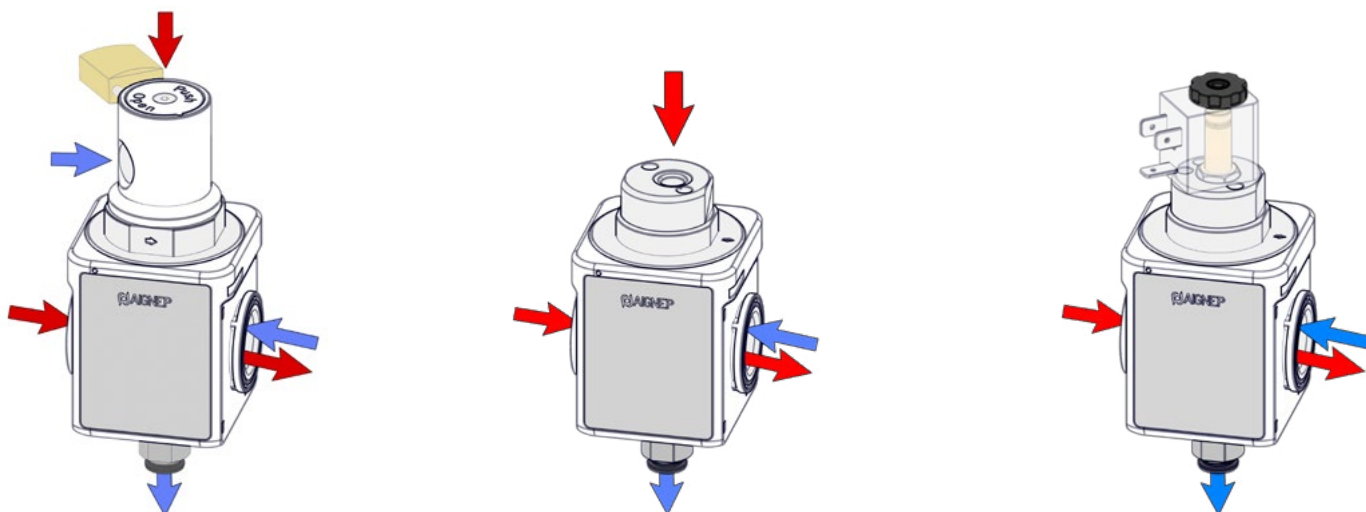


Regulators

Regulators are available with a built-in Gauge or without. The adjusting knobs can lock into place and come with an anti-tampering system. Assembly kits for 1/8" Gauges are available upon request.

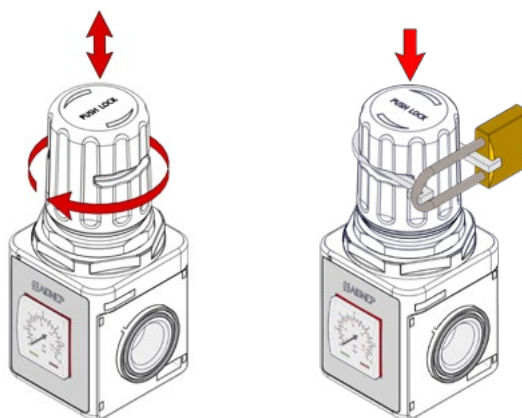

Regulators


Regulators can be assembled together. Whether they have the built-in Gauge or not, they can all be connected.

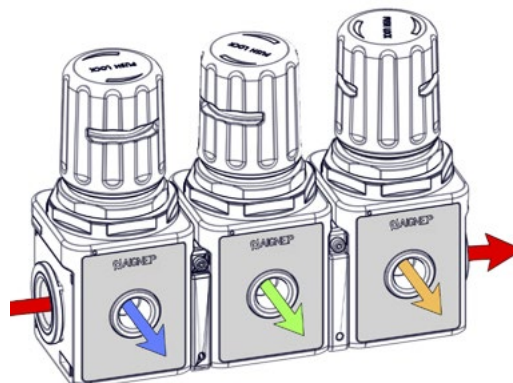




Regulators

Several options of Gauges and pressure switches are available. Gauges and pressure switches can be inverted if desired. (Y020 - Y030)

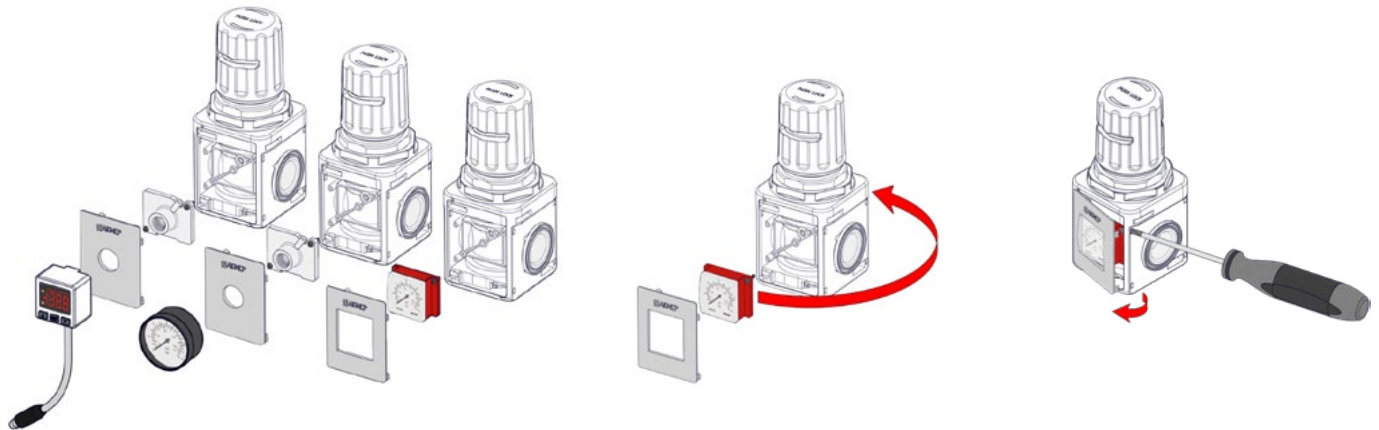


Condensation Drains

There are 2 available options for the condensation drain, with depressure drain or automatic with float.

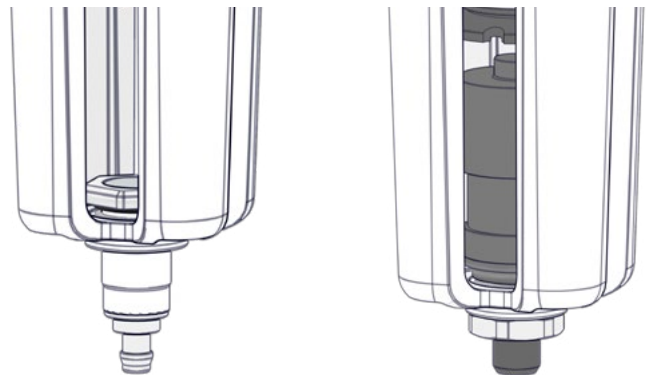

Coalescer Filter


20 μm , 5 μm filters and 0.01 μm coalescer filter.

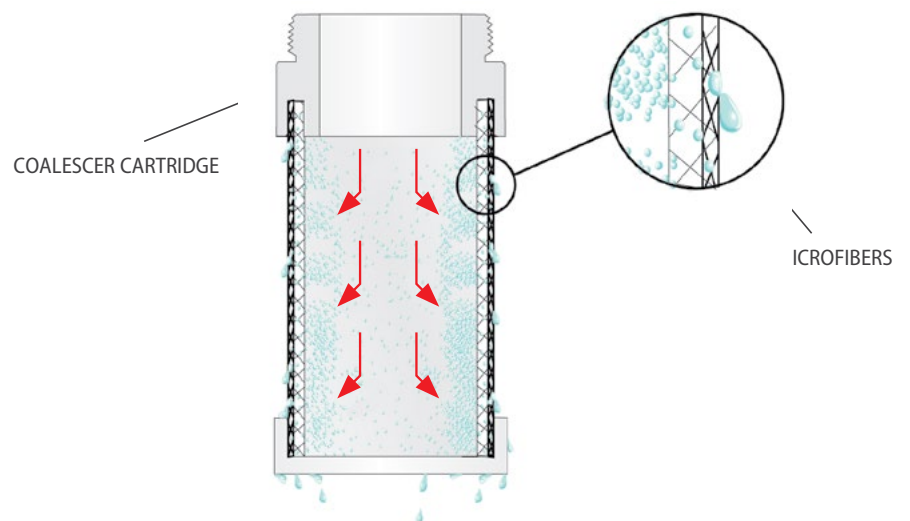




Lubricators

The are 2 available options for the lubricator unit, with manual loading or with automatic vacuum-operated loading.

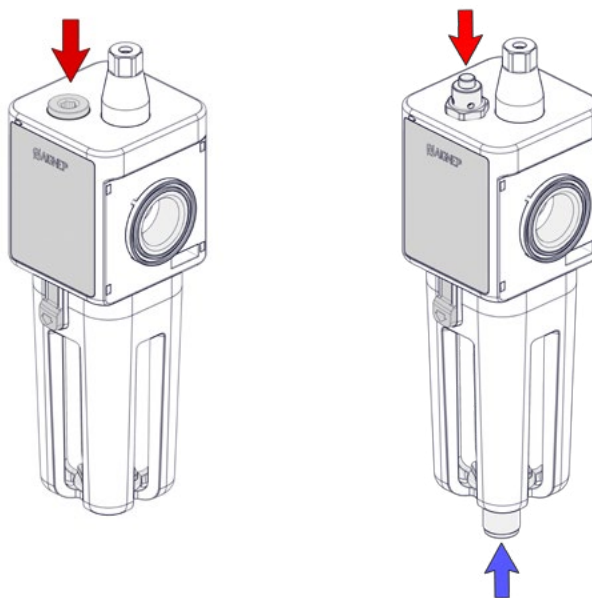

Soft Start Valve

Soft start valve with adjustment screw.

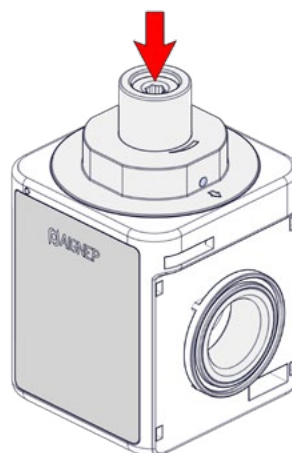

N010

FILTER



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH✓

2011/65/CE
RoHS✓

PED
2014/68/UE

II 2GD Ex h TX
Ex


	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2500 NI/min (88.2 cfm)	4100 NI/min (144.7 cfm)	7900 NI/min (278.9 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm ³	37 cm ³	151 cm ³
FILTRATION GRADE	5 μm 20 μm STANDARD		
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		



Part Numbering System

Code	Size	Thread	Filtration	Condensate exhaust	-
N 0 1 0	1	0 3	1	0 1	0 0 0
	FRL 1	→ 03 = 1/4" 04 = 3/8"	1 = 5 μm 2 = 20 μm	1 = Depressure drain 2 = Automatic with float (max 8 bar)	
	FRL 2	→ 04 = 3/8" 05 = 1/2"			
	FRL 3	→ 07 = 3/4" 09 = 1"			

N010

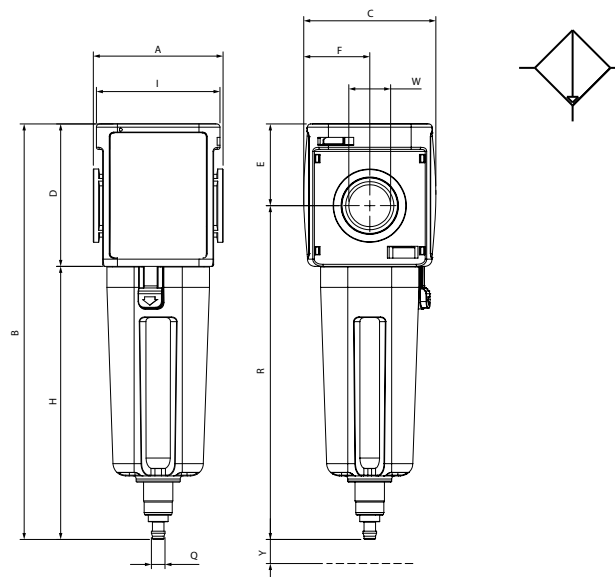

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	H	I	Q	R	T
51	176	51	57	1/4" - 3/8"	32.5	25.5	119	47.5	E.D. 256 (6.5)	144	7

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	H	I	Q	R	T
62	197.5	63	68	3/8" - 1/2"	39	31.5	129.5	59	E.D. 256 (6.5)	158.5	9.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	H	I	Q	R	T
90	250	92	89	3/4" - 1"	47	46	161	77.5	E.D. 256 (6.5)	203	70

DEP = Vacuum-operated

A = Automatic


Code	Size	Thread (NPTF)	Filtration	Flow Rate	Exhaust
N010 103 201 000	FIL 1	1/4"	20 µm	2500 NI/min (88.2 cfm)	DEP
N010 104 201 000	FIL 1	3/8"	20 µm	2500 NI/min (88.2 cfm)	DEP
N010 104 202 000	FIL 1	3/8"	20 µm	2500 NI/min (88.2 cfm)	A
N010 204 201 000	FIL 2	3/8"	20 µm	4100 NI/min (144.7 cfm)	DEP
N010 205 201 000	FIL 2	1/2"	20 µm	4100 NI/min (144.7 cfm)	DEP
N010 205 202 000	FIL 2	1/2"	20 µm	4100 NI/min (144.7 cfm)	A
N010 307 201 000	FIL 3	3/4"	20 µm	7900 NI/min (278.9 cfm)	DEP
N010 309 201 000	FIL 3	1"	20 µm	7900 NI/min (278.9 cfm)	DEP
N010 309 202 000	FIL 3	1"	20 µm	7900 NI/min (278.9 cfm)	A



Condensation Drain

DEP: The depressure drain condensation drain is normally in the open position. It automatically drains the condensation when there is no pressure in the bowl. By pressing the hose connector, the condensation will get pressurized and drained.

A: The automatic condensation drain with float drains the condensation when the maximum level is reached independently from the air pressure in the system.

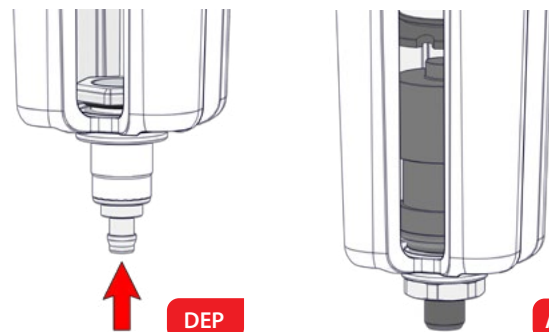

N015

COALESCER FILTER



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

II 2GD Ex h TX
Ex

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	600 NI/min (21.1 cfm)	750 NI/min (26.4 cfm)	1400 NI/min (49.4 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm ³	37 cm ³	151 cm ³
FILTRATION GRADE	0.01 μm		
FLUID	5 μm filtered Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		




Part Numbering System

NB: With Coalescer Filter Series N015, we recommend installing a 5 μm Filter upstream.

Code	Size	Thread	Filtration	Condensate exhaust	-
N 0 1 5	1	0 3	4	0 1	0 0 0
FRL1	→	03 = 1/4 04 = 3/8	04 = 0.01 μm	1 = Depressure drain 2 = Automatic with float (max 8 bar)	
FRL2	→	04 = 3/8 05 = 1/2			
FRL3	→	07 = 3/4 09 = 1			

N015

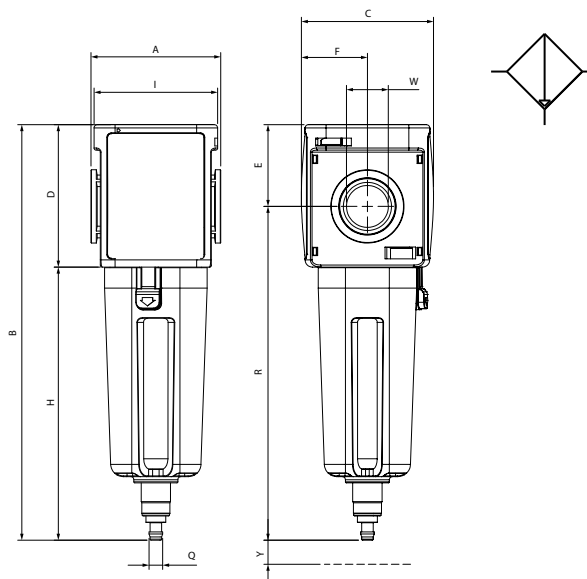
Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	H	I	Q	R	Y
51	176	51	57	1/4" - 3/8"	32.5	25.5	119	47.5	E.D. 256 (6.5)	144	7

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	H	I	Q	R	Y
62	197.5	63	68	3/8" - 1/2"	39	31.5	129.5	59	E.D. 256 (6.5)	158.5	9.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	H	I	Q	R	Y
90	250	92	89	3/4" - 1"	47	46	161	77.5	E.D. 256 (6.5)	203	70


DEP = Vacuum-operated

Code	Size	Thread (NPTF)	Filtration	Flow Rate	Exhaust
N015 103 401 000	FC 1	1/4"	0.01 µm	600 NI/min (21.1 cfm)	DEP
N015 104 401 000	FC 1	3/8"	0.01 µm	600 NI/min (21.1 cfm)	DEP
N015 104 402 000	FC 1	3/8"	0.01 µm	600 NI/min (21.1 cfm)	A
N015 204 401 000	FC 2	3/8"	0.01 µm	750 NI/min (26.4 cfm)	DEP
N015 205 401 000	FC 2	1/2"	0.01 µm	750 NI/min (26.4 cfm)	DEP
N015 205 402 000	FC 2	1/2"	0.01 µm	750 NI/min (26.4 cfm)	A
N015 307 401 000	FC 3	3/4"	0.01 µm	1400 NI/min (49.4 cfm)	DEP
N015 309 401 000	FC 3	1"	0.01 µm	1400 NI/min (49.4 cfm)	DEP
N015 309 402 000	FC 3	1"	0.01 µm	1400 NI/min (49.4 cfm)	A



Coalescer Cartridge

The coalescer cartridge is made of a microfiber layer with an external stainless steel structure. The coalescer cartridge uses inertial impact, interception and coalescence to form liquid particles into drops. These drops will fall into the bottom of the bowl. The coalescer filter is used as an oil separator which removes oil-vapours from the air output. We recommend installing a 5 µm filter upstream to protect the coalescing filter from choking the cartridge.

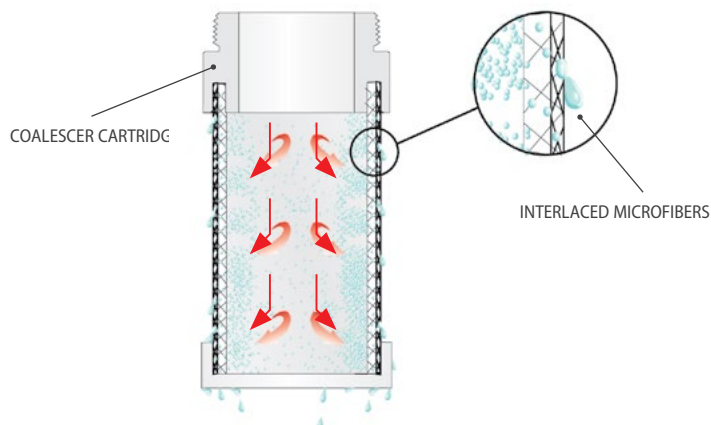

N016

ACTIVE CARBON FILTER



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

II 2GD Ex h TX
Ex

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	1270 NI/min (44.8 cfm)	1810 NI/min (63.9 cfm)	3500 NI/min (123.6 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm ³	37 cm ³	151 cm ³
DEGREE OF FILTRATION: ISO 8573	Output oil concentration < 0.005 mg/m ³		
FLUID	0.01 μm Filtered Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	+1.5 °C (34.7 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		




Part Numbering System

NB: With Coalescer Filter Series N015, we recommend installing a 5 μm Filter upstream.

Code	Size	Thread	Filtration	Condensate exhaust	-
N 0 1 6	1	0 3	5	0 1	0 0 0
	FRL 1	→ 03 = 1/4" 04 = 3/8"	05 = <0.005 mg/m ³	1 = Depressure drain	
	FRL 2	→ 04 = 3/8" 05 = 1/2"			
	FRL 3	→ 07 = 3/4" 09 = 1"			

N016

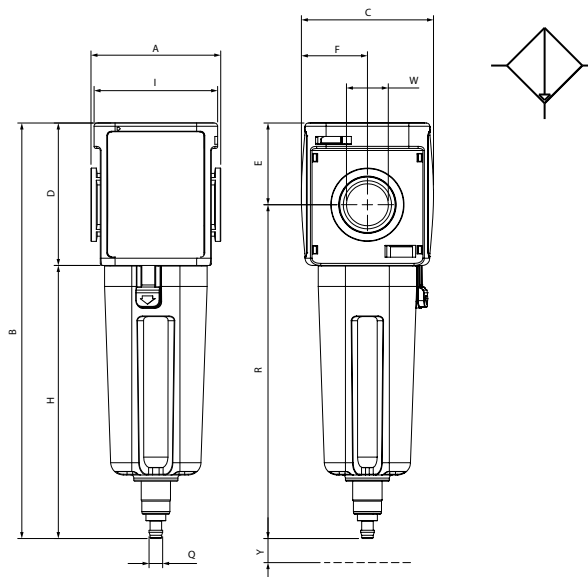

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	H	I	Q	R	Y
51	176	51	57	1/4" - 3/8"	32.5	25.5	119	47.5	E.D. 256 (6.5)	144	7

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	H	I	Q	R	Y
62	197.5	63	68	3/8" - 1/2"	39	31.5	129.5	59	E.D. 256 (6.5)	158.5	9.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	H	I	Q	R	Y
90	250	92	89	3/4" - 1"	47	46	161	77.5	E.D. 256 (6.5)	203	70

DEP = Vacuum-operated

Code	Size	Thread (NPTF)	Filtration	Flow Rate	Exhaust
N016 103 501 000	AC 1	1/4"	< 0.005 mg/m ³	1270 NI/min (44.8 cfm)	DEP
N016 104 501 000	AC 1	3/8"	< 0.005 mg/m ³	1270 NI/min (44.8 cfm)	DEP
N016 204 501 000	AC 2	3/8"	< 0.005 mg/m ³	1810 NI/min (63.9 cfm)	DEP
N016 205 501 000	AC 2	1/2"	< 0.005 mg/m ³	1810 NI/min (63.9 cfm)	DEP
N016 307 501 000	AC 3	3/4"	< 0.005 mg/m ³	3500 NI/min (123.6 cfm)	DEP
N016 309 501 000	AC 3	1"	< 0.005 mg/m ³	3500 NI/min (123.6 cfm)	DEP




It's recommended to replace the activated carbon filter (Cod. T546) every 6 months.



Condensation Drain

DEP: The depressure drain condensation drain is normally in the open position. It automatically drains the condensation when there is no pressure in the bowl. By pressing the hose connector, the condensation will get pressurized and drained.



N020

REGULATOR



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH ✓

2011/65/CE
RoHS ✓

PED
2014/68/UE

II 2GD Ex h TX
Ex


	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2600 NI/min (91.8 cfm)	4000 NI/min (141.2 cfm)	7700 NI/min (271.9 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
REGULATION RANGE	0 ÷ 2 bar (29 PSI) 0 ÷ 4 bar (58 PSI) 0 ÷ 8 bar STANDARD (116 PSI) 0 ÷ 12 bar (174 PSI)		
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		



Part Numbering System

Code	Size	Thread	Regulation	-	Manometer System
N 0 2 0	1	0 3	0 1 0		0 0 0
	FRL1	→ 03 = 1/4 04 = 3/8	1 = 0÷2 bar (G1 - G2) 2 = 0÷4 bar (G1 - G2) 3 = 0÷8 bar (G1 - G2 - G3) 4 = 0÷12 bar (G1 - G2 - G3)		0 = Manometer incorporated 2 = Adapter for manometer 1/8 Gas (Manometer not included)
	FRL2	→ 04 = 3/8 05 = 1/2			
	FRL3	→ 07 = 3/4 09 = 1			

N020

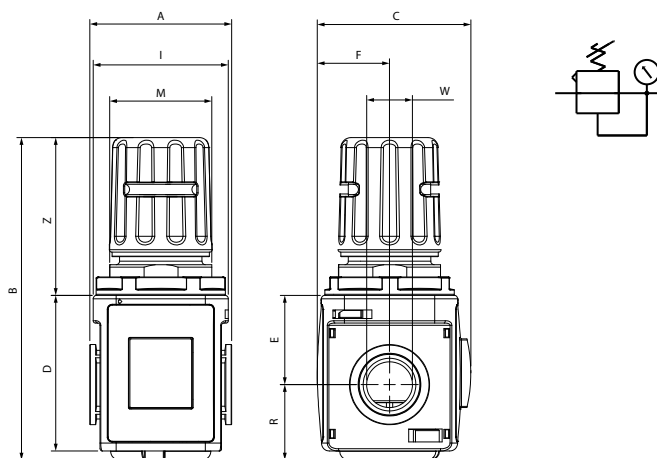

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	I	R	M	Z
51	117	57	57	1/4" - 3/8"	32.5	25.5	47.5	28	M37 x 1.5	57



Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	I	R	M	Z
62	141.5	67	68	3/8" - 1/2"	39	31.5	59	33	M37 x 1.5	72.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	I	R	M	Z
90	178	96	89	3/4" - 1"	47	46	77.5	52	M59 x 1.5	79


Code	Size	Thread (NPTF)	Regulation	Flow Rate
N020 103 030 000	REG 1	1/4"	0 ÷ 8 bar (116 PSI)	2600 NI/min (91.8 cfm)
N020 104 030 000	REG 1	3/8"	0 ÷ 8 bar (116 PSI)	2600 NI/min (91.8 cfm)
N020 204 030 000	REG 2	3/8"	0 ÷ 8 bar (116 PSI)	4000 NI/min (141.2 cfm)
N020 205 030 000	REG 2	1/2"	0 ÷ 8 bar (116 PSI)	4000 NI/min (141.2 cfm)
N020 307 030 000	REG 3	3/4"	0 ÷ 8 bar (116 PSI)	7700 NI/min (271.9 cfm)
N020 309 030 000	REG 3	1"	0 ÷ 8 bar (116 PSI)	7700 NI/min (271.9 cfm)

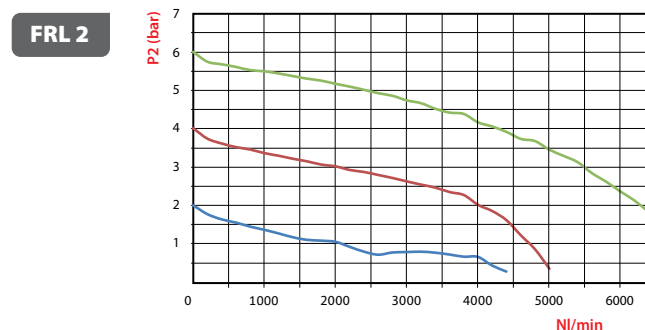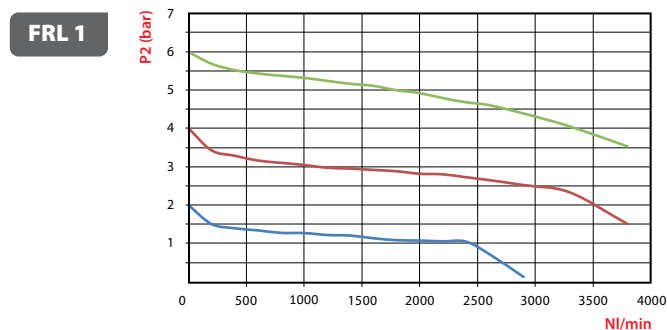

Regulating the Air Pressure

Follow the instructions below to set the air pressure:

- 1 Raise the knob to the regulating position.
- 2 Rotate to set the desired pressure, always in ascending order.
- 3 Press the knob down to lock into position.
The knob can be padlocked to prevent tampering.

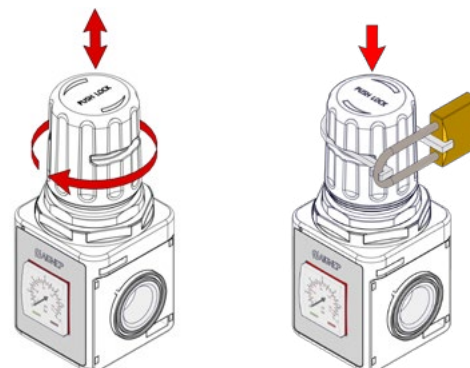

N022

REGULATOR



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH ✓

2011/65/CE
RoHS ✓

PED
2014/68/UE





		FRL 1	FRL 2
	METALLIC THREAD	1/8" NPTF	1/4" NPTF
	AIR CONSUMPTION WITH 10 BAR	4.4 l/min (ANR) F.S. (0.155 cfm)	4.4 l/min (ANR) F.S. (0.155 cfm)
	WALL CLAMPING SCREWS	M4 x 14 M8 x 14	M5 x 18 M9 x 18
	MANOMETER FASTENING	1/8" NPTF	
	REGULATION RANGE	0 ÷ 4 bar (58 PSI) 0 ÷ 8 bar (116 PSI)	
	FLUID	Compressed Air	
	MAX PRESSURE	10 bar (145 PSI)	
	TEMPERATURE	-5 °C (23 F) + 60 °C (140 F) at 10 bar (145 PSI)	
	MOUNTING POSITION	Vertical	
	CLAMP BRACKET FOR T022 (on request)	 Cod. REG32	



Part Numbering System

Code	Size	Thread	Regulation	-
N 0 2 2	1	0 3	0 2 0	0 0 0
	FRL1	→ 02 = 1/8 NPTF	2 = 0 ÷ 4 bar (58 PSI)	
	FRL2	→ 03 = 1/4 NPTF	3 = 0 ÷ 8 bar (116 PSI)	
	FRL3	→ 05 = 1/2 NPTF		

N022




Code	Size	Thread (NPTF)	Regulation	Air consumption with 10 Bar
N022 102 020 000	REGP 1	1/8"	0 ÷ 4 bar (58 PSI)	4.4 l/min (ANR) F.S. (0.155 cfm)
N022 102 030 000	REGP 1	1/8"	0 ÷ 8 bar (116 PSI)	4.4 l/min (ANR) F.S. (0.155 cfm)
N022 203 020 000	REGP 2	1/4"	0 ÷ 4 bar (58 PSI)	4.4 l/min (ANR) F.S. (0.155 cfm)
N022 203 030 000	REGP 2	1/4"	0 ÷ 8 bar (116 PSI)	4.4 l/min (ANR) F.S. (0.155 cfm)
N022 205 020 000	REGP 3	1/2"	0 ÷ 4 bar (58 PSI)	11.5 l/min (ANR) F.S. (0.406 cfm)
N022 205 030 000	REGP 3	1/2"	0 ÷ 8 bar (116 PSI)	11.5 l/min (ANR) F.S. (0.406 cfm)

N504

SIDE HITCH ADAPTER KIT "UNIVERSAL SHORT"


Code		G
N504 100 000 000	FRL 1	1/4
N504 200 000 000	FRL 2	1/2

It's recommended to use the sealant on the thread.

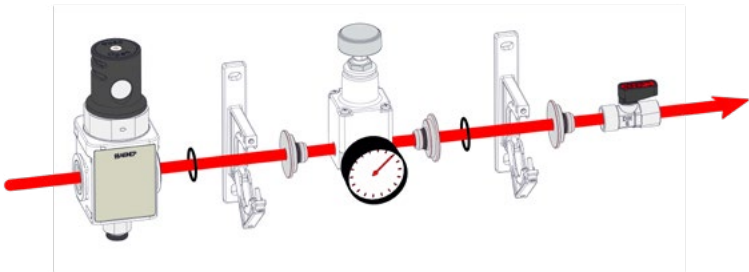



Dimensions

FRL 1-2

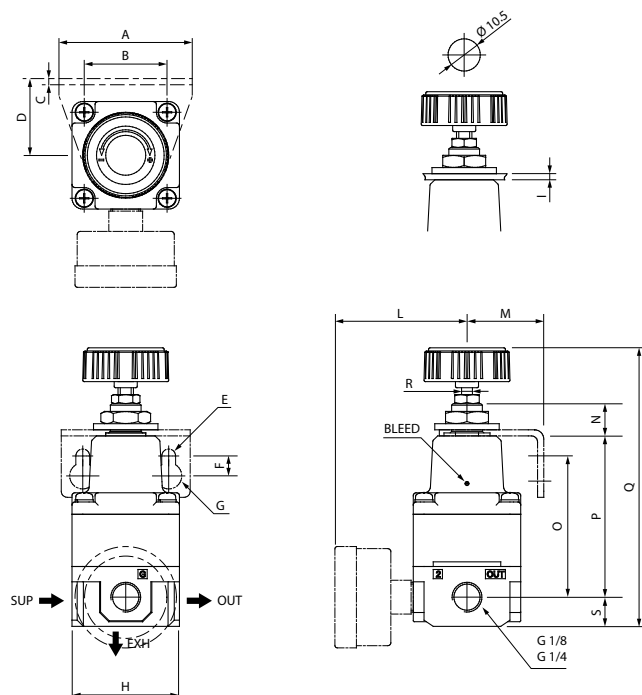

	FRL 1	FRL 2
A	42	50
B	28	36
C	2	2
D	25	30
E	Ø 4.5	Ø 5.5
F	6.5	7
G	Ø 8.5	Ø 9.5
H	35	59.2
I	Max 4	Max 4
L	43	55
M	25	30
N	10.5	11.3
O	46	53
P	52.5	71
Q	90.7	127.3
R	M5 x 0.5	M6 x 0.5
S	9.5	18.5













FRL 3

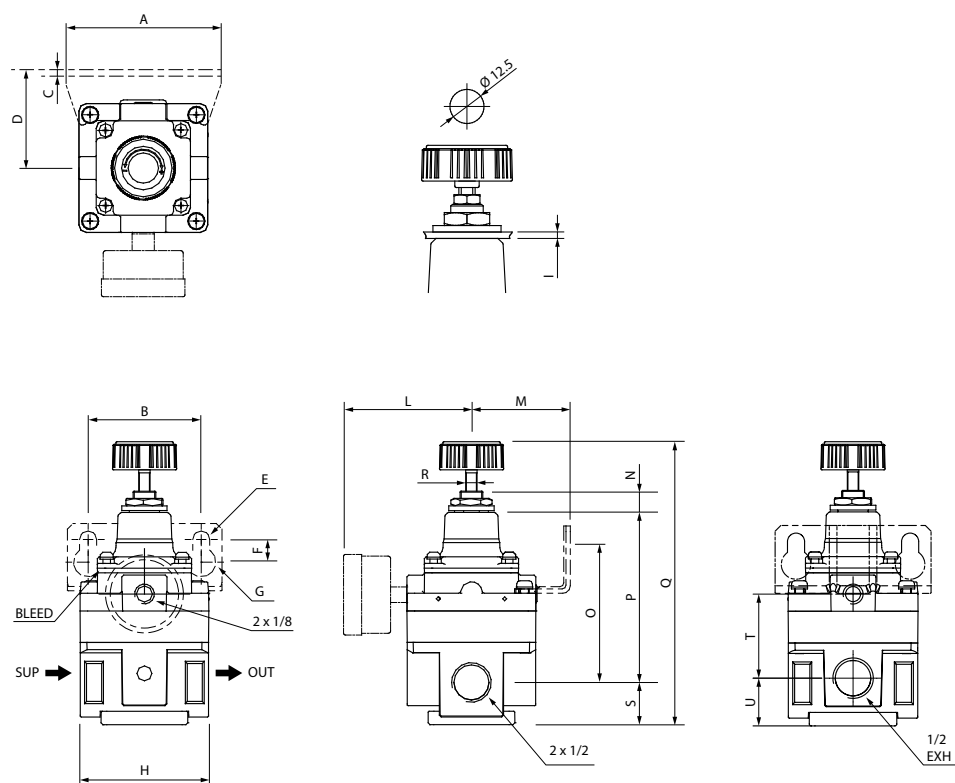

	FRL 3
A	82
B	60
C	2.3
D	52.45
E	Ø 9
F	12
G	Ø 15.5
H	68
I	Max 4
L	68
M	52.4
N	11.3
O	74.5
P	90.1
Q	150
R	Ø 6
S	22.4
T	44.2
U	25.1

P2 (bar)
 Outlet pressure
NI/min
 Air flow
20 °C 1 bar

Inlet pressure
7 bar

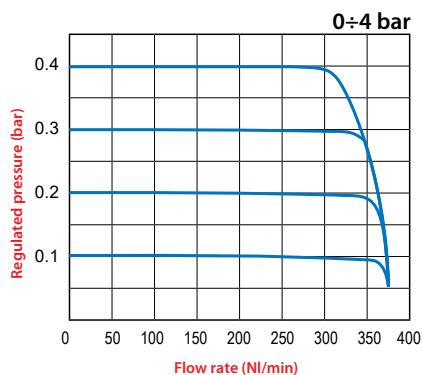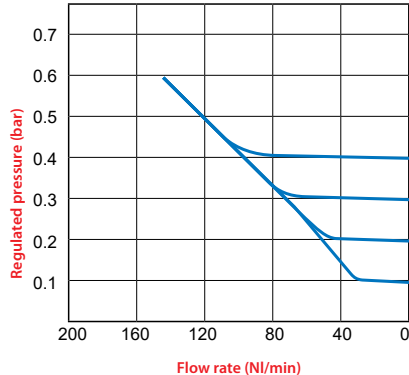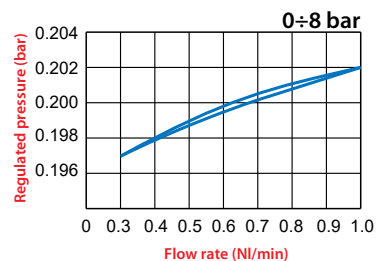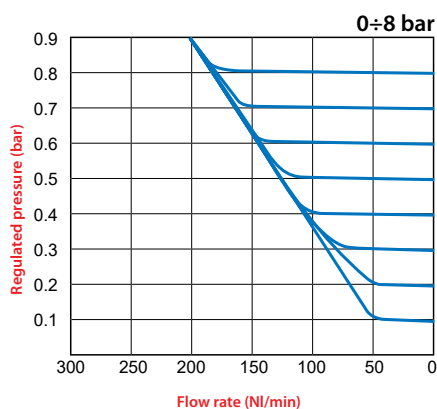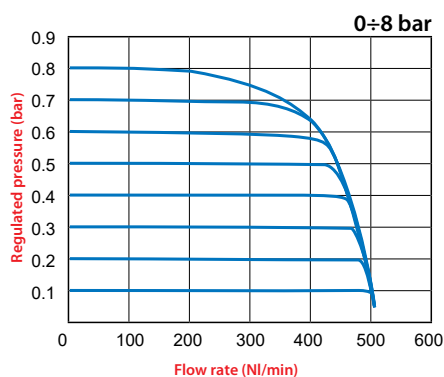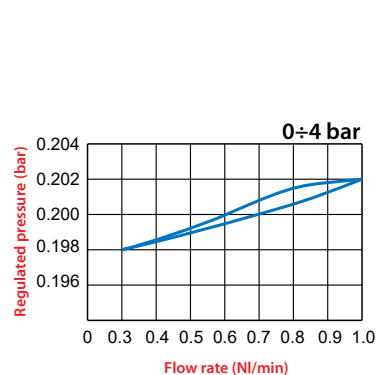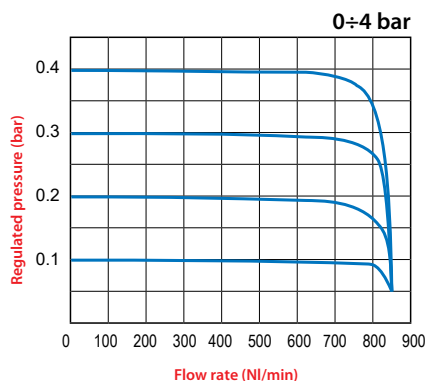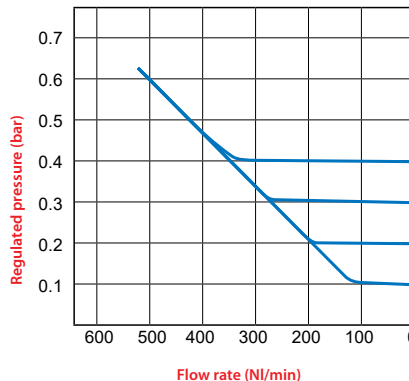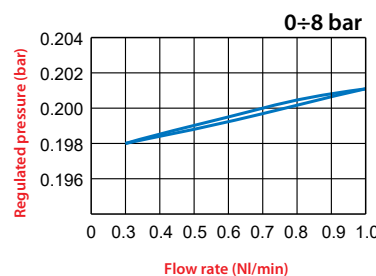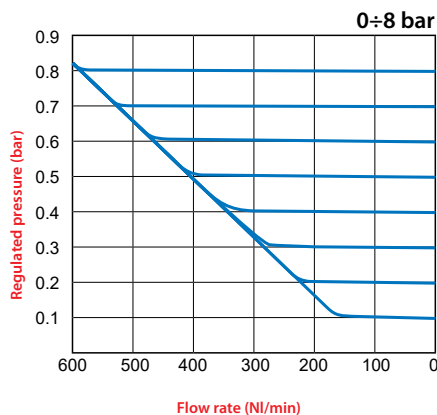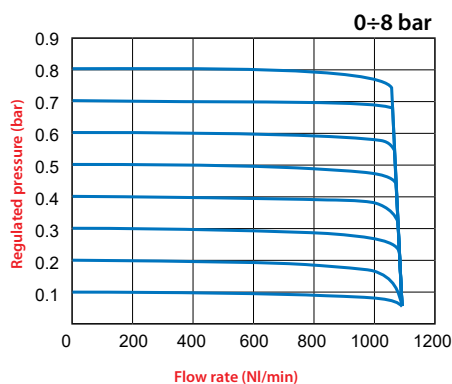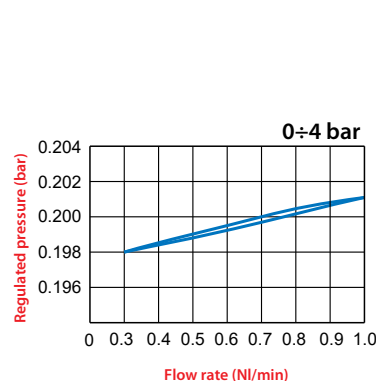
FRL 1
Flow feature

Relief characteristics

Pressure characteristics

FRL 2
Flow feature

Relief characteristics

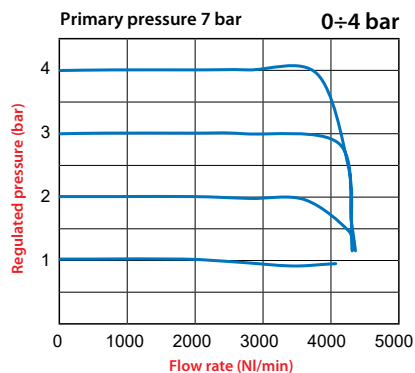Pressure characteristics


P2 (bar) NI/min 20 °C 1 bar
 Outlet pressure Air flow


Inlet pressure 7 bar

FRL 3





Flow feature



Relief characteristics

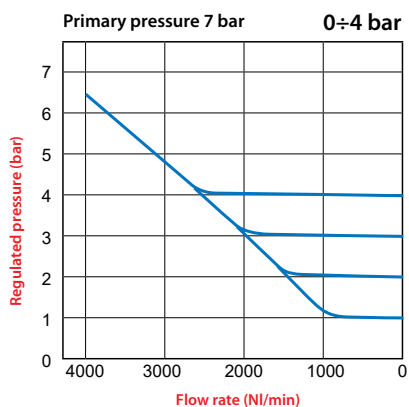

Pressure characteristics

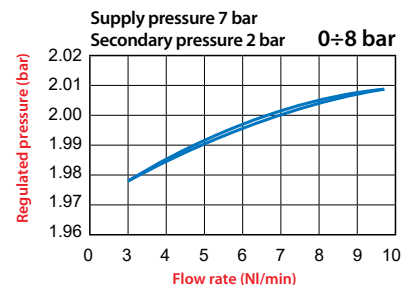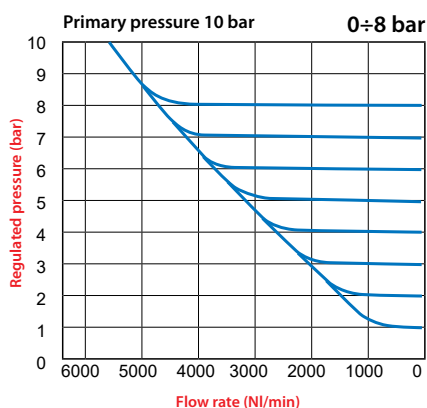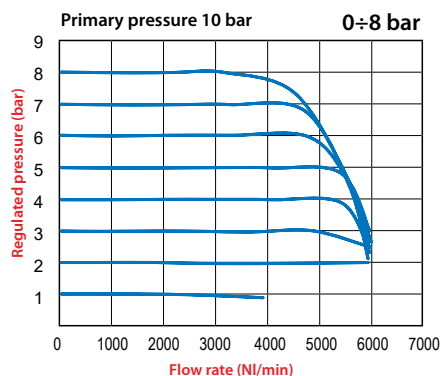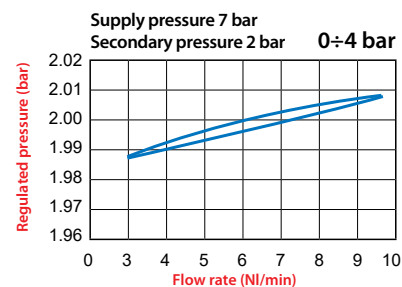

N025

FRONTAL REGULATOR



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006

REACH

2011/65/CE

RoHS

PED

2014/68/UE

II 2GD Ex h TX

Ex



	FRL 1	FRL 2
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm
6 bar FLOW RATE with Δp 1 bar	2700 NI/min (95.3 cfm)	3500 NI/min (123.6 cfm)
MOUNTING SCREWS	M5 x 15	
REGULATION RANGE	0 ÷ 2 bar (29 PSI) 0 ÷ 4 bar (58 PSI) 0 ÷ 8 bar STANDARD (116 PSI) 0 ÷ 12 bar (174 PSI)	
FLUID	Compressed Air	
MAX PRESSURE	15 bar (217 PSI)	
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)	
MOUNTING POSITION	Vertical	
FRONT THREADED	1/8" NPTF	3/8" NPTF



Part Numbering System

Code	Size	Thread	Regulation	-	Manometer System
N 0 2 5	1	0 3	0 1 0	-	0 0 0
	FRL1	03 = 1/4 04 = 3/8	1 = 0 ÷ 2 bar 2 = 0 ÷ 4 bar 3 = 0 ÷ 8 bar 4 = 0 ÷ 12 bar		0 = SX Manometer incorporated - Front 1 = DX Manometer incorporated - Back 2 = SX Adapter for manometer 1/8 Gas - Front 3 = DX Adapter for manometer 1/8 Gas - Back
	FRL2	04 = 3/8 05 = 1/2			

N025

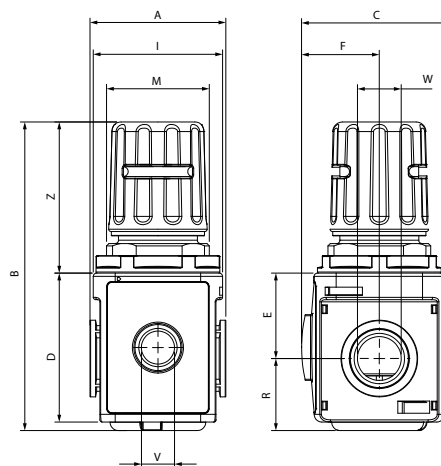

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	I	R	M	Z	V
51	117	57	57	1/4" - 3/8"	32.5	31	47.5	28	M37 x 1.5	57	1/8

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	I	R	M	Z	V
62	141.5	67	68	3/8" - 1/2"	39	35.5	59	33	M37 x 1.5	72.5	3/8"


Code	Size	Thread (NPTF)	Regulation	Flow Rate
SX Gauge incorporated - Front				
N025 103 030 000	REG F 1	1/4"	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)
N025 104 030 000	REG F 1	3/8"	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)
N025 204 030 000	REG F 2	3/8"	0 ÷ 8 bar (116 PSI)	3500 NI/min (123.6 cfm)
N025 205 030 000	REG F 2	1/2"	0 ÷ 8 bar (116 PSI)	3500 NI/min (123.6 cfm)
DX Gauge incorporated - Back				
N025 103 030 001	REG F 1	1/4"	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)
N025 104 030 001	REG F 1	3/8"	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)
N025 204 030 001	REG F 2	3/8"	0 ÷ 8 bar (116 PSI)	3500 NI/min (123.6 cfm)
N025 205 030 001	REG F 2	1/2"	0 ÷ 8 bar (116 PSI)	3500 NI/min (123.6 cfm)



Regulating the Air Pressure


Follow the instructions below to set the air pressure:

- 1 Raise the knob to the regulating position.
- 2 Rotate to set the desired pressure, always in ascending order.
- 3 Press the knob down to lock into position.
The knob can be padlocked to prevent tampering.

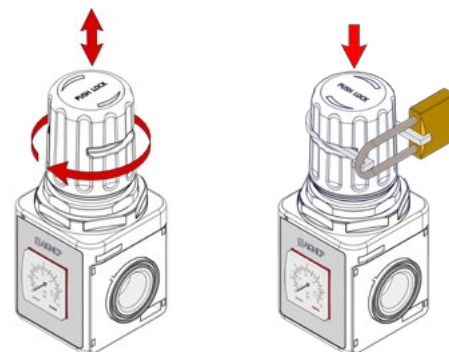

Regulators

Regulators can be assebled together. Whether they have the built-in Gauge or not, they all can be connected.

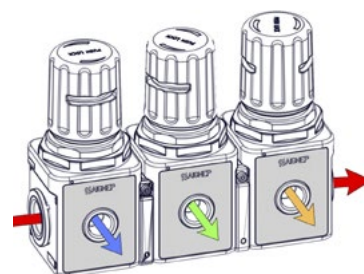

N030
FILTER REGULATOR

TECHNICAL CHARACTERISTICS

Reference standard

1907/2006
REACH ✓

2011/65/CE
RoHS ✓

PED
2014/68/UE



II 2GD Ex h TX
Ex

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2000 NI/min (77.6 cfm)	3000 NI/min (116.5 cfm)	5800 NI/min (204.8 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm³	37 cm³	151 cm³
FILTRATION GRADE	5 μm 20 μm STANDARD		
REGULATION RANGE	0 ÷ 2 bar (29 PSI) 0 ÷ 4 bar (58 PSI) 0 ÷ 8 bar STANDARD (116 PSI) 0 ÷ 12 bar (174 PSI)		
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		


Part Numbering System

Code	Size	Thread	Filtration	Regulation	Exhaust	Manometer System
N 0 3 0	1	0 3	1	1	1	0 0 0
	FRL1 →	03 = 1/4 04 = 3/8	1 = 5 μm 2 = 20 μm	1 = 0÷2 bar (G1 - G2) 2 = 0÷4 bar (G1 - G2) 3 = 0÷8 bar (G1 - G2 - G3) 4 = 0÷12 bar (G1 - G2 - G3)	1 = Depressure drain 2 = Adapter for manometer 1/8 Gas (Manometer not included)	0 = Manometer incorporated 2 = Adapter for manometer 1/8 Gas (Manometer not included)
	FRL2 →	04 = 3/8 05 = 1/2				
	FRL3 →	07 = 3/4 09 = 1				

N030

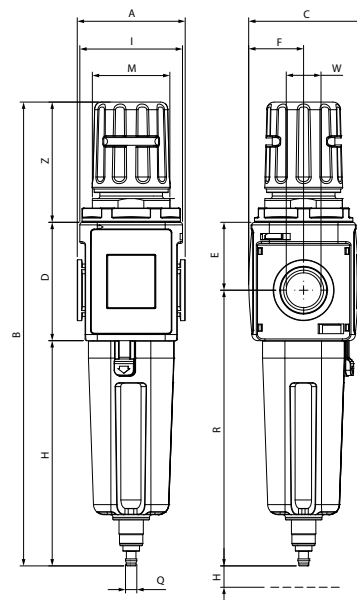

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	H	I	M	R	Q	Z	Y
51	233	57	57	1/4" - 3/8"	32.5	25.5	119	47.5	M37 x 1.5	144	ED.256 (6.5)	57	7

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	H	I	M	R	Q	Z	Y
62	270	67	68	3/8" - 1/2"	39	31.5	129.5	59	M47 x 1.5	158.5	ED.256 (6.5)	72.5	9.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	H	I	M	R	Q	Z	Y
90	329	96	89	3/4" - 1"	47	46	161	77.5	M59 x 1.5	203	ED.256 (6.5)	79	70

DEP = Vacuum-operated

A = Automatic


Code	Size	Thread (NPTF)	Filtration	Regulation	Flow Rate	Exhaust
N030 103 231 000	FR 1	1/4"	20 µm	0 ÷ 8 bar (116 PSI)	2000 NI/min (77.6 cfm)	DEP
N030 104 231 000	FR 1	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	2000 NI/min (77.6 cfm)	DEP
N030 104 232 000	FR 1	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	2000 NI/min (77.6 cfm)	A
N030 204 231 000	FR 2	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	3000 NI/min (116.5 cfm)	DEP
N030 205 231 000	FR 2	1/2"	20 µm	0 ÷ 8 bar (116 PSI)	3000 NI/min (116.5 cfm)	DEP
N030 205 232 000	FR 2	1/2"	20 µm	0 ÷ 8 bar (116 PSI)	3000 NI/min (116.5 cfm)	A
N030 307 231 000	FR 3	3/4"	20 µm	0 ÷ 8 bar (116 PSI)	5800 NI/min (204.8 cfm)	DEP
N030 309 231 000	FR 3	1"	20 µm	0 ÷ 8 bar (116 PSI)	5800 NI/min (204.8 cfm)	DEP
N030 309 232 000	FR 3	1"	20 µm	0 ÷ 8 bar (116 PSI)	5800 NI/min (204.8 cfm)	A



Regulating the Air Pressure

Follow the instructions below to set the air pressure:

- 1 Raise the knob to the regulating position.
- 2 Rotate to set the desired pressure, always in ascending order.
- 3 Press the knob down to lock into position.
The knob can be padlocked to prevent tampering.

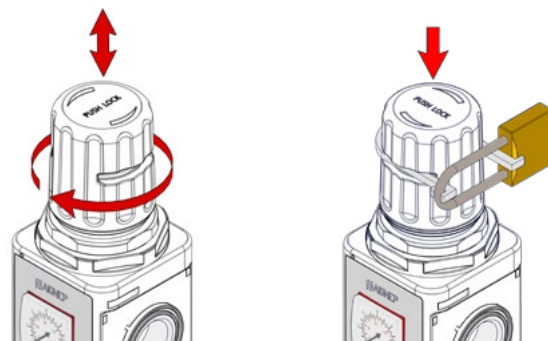

N040

LUBRICATOR



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006

REACH

2011/65/CE

RoHS

PED

2014/68/UE

II 2GD Ex h TX

Ex


	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	3400 NI/min (120 cfm)	6100 NI/min (215.4 cfm)	11700 NI/min (413.1 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm³	37 cm³	151 cm³
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		
RECOMMENDED OILS	CLASS ISO 22 ISO 3448 NORMA		



Part Numbering System

Code	Size	Thread	-	Oil loading Systema
N 0 4 0	1	0 3	0 0 0	0 0 0
	FRL1	03 = 1/4 04 = 3/8		1 = Manual 2 = Automatic vacuum-operated
	FRL2	04 = 3/8 05 = 1/2		
	FRL3	07 = 3/4 09 = 1		

N040

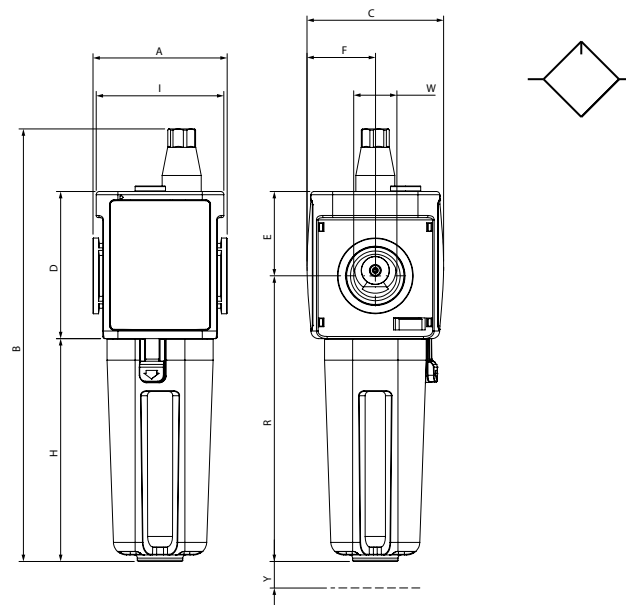

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	H	I	R	Y
51	178.5	51	57	1/4" - 3/8"	32.5	25.5	92.5	47.5	117.5	7

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	H	I	R	Y
62	200	63	68	3/8" - 1/2"	39	31.5	103	59	132	9.5

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	H	I	R	Y
90	254	92	89	3/4" - 1"	47	46	136	77.5	178	19

DEP = Manual

A = Automatic vacuum-operated

Code	Size	Thread (NPTF)	Flow Rate	Oil loading System
N040 103 000 100	LUB 1	1/4"	3400 NI/min (120 cfm)	M
N040 104 000 100	LUB 1	3/8"	3400 NI/min (120 cfm)	M
N040 104 000 200	LUB 1	3/8"	3400 NI/min (120 cfm)	A
N040 204 000 100	LUB 2	3/8"	6100 NI/min (215.4 cfm)	M
N040 205 000 100	LUB 2	1/2"	6100 NI/min (215.4 cfm)	M
N040 205 000 200	LUB 2	1/2"	6100 NI/min (215.4 cfm)	A
N040 307 000 100	LUB 3	3/4"	11700 NI/min (413.1 cfm)	M
N040 309 000 100	LUB 3	1"	11700 NI/min (413.1 cfm)	M
N040 309 000 200	LUB 3	1"	11700 NI/min (413.1 cfm)	A



Lubricators

The oil is added to the lubricator unit by unscrewing the cap on the top or by removing the bowl. Make sure that there is no pressure running inside the unit. You can adjust the oil flow by using a screwdriver. We recommend adding one drop of oil every 300-600 NI/min.

M




Lubricators

The vacuum-operated oil loading enables the bowl to be filled with oil automatically. The system is activated by a button on the top. The newly added oil, positioned at a lower height relatively to the lubricator unit, flows into the bowl thanks to a G1/8" attachment positioned on the bottom side of the unit. Stop adding oil once it reaches the maximum level, shown by the windows on the side of the bowl.

A



Push start button to prime the oil.

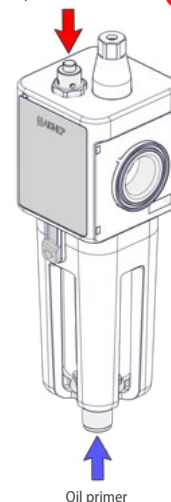

N050 - FRL 1 / FRL2

MANUAL SHUT OFF VALVE



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

II 2GD Ex h TX
Ex


		FRL 1	FRL 2
	METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF
	TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm
	6 bar FLOW RATE with Δp 1 bar	2700 NI/min (95.3 cfm)	3500 NI/min (123.6 cfm)
	MOUNTING SCREWS	M5 x 15	
	FLUID	Compressed Air	
	MAX PRESSURE	10 bar (145 PSI)	
	TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)	
	MOUNTING POSITION	Vertical	



Part Numbering System

Code	Size	Thread	-	-
N 0 5 0	1	0 3	0 0 0	0 0 0
	FRL1	03 = 1/4 04 = 3/8		
	FRL2	04 = 3/8 05 = 1/2		

N050

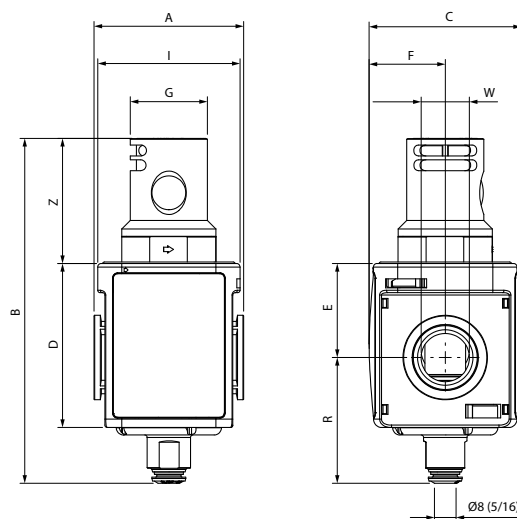

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	G	I	R	Z
51	134	51	57	1/4" - 3/8"	32.5	25.5	32	47.5	46	56

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	G	I	R	Z
62	143	63	68	3/8" - 1/2"	39	31.5	32	59	52	51

M = Manual

Code	Size	Thread (NPTF)	Flow Rate	Function	Drive
N050 103 000 000	V3V 1	1/4"	2700 NI/min (95.3 cfm)	NC	M
N050 104 000 000	V3V 1	3/8"	2700 NI/min (95.3 cfm)	NC	M
N050 204 000 000	V3V 2	3/8"	3500 NI/min (123.6 cfm)	NC	M
N050 205 000 000	V3V 2	1/2"	3500 NI/min (123.6 cfm)	NC	M




Shut Off Valves

The shut off valve gets activated in the following phases:

1. By pressing the trigger switch 1, the primary circuit opens.

2. By pressing button 2, the primary circuit closes and the secondary circuit drains.

This latter position can be padlocked.

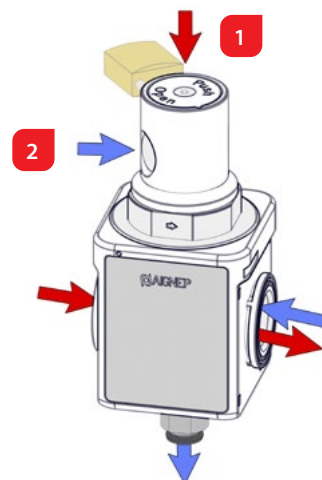

N050 - FRL 3

MANUAL SHUT OFF VALVE



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH ✓

2011/65/CE
RoHS ✓

PED
2014/68/UE

II 2GD Ex h TX
Ex



FRL 3		
	METALLIC THREAD	3/4" NPTF 1" NPTF
	TORQUE SPECIFICATIONS	Max 50 Nm
	6 bar FLOW RATE with Δp 1 bar	6700 NI/min (236.6 cfm)
	MOUNTING SCREWS	M6 x 15
	FLUID	Compressed Air
	MAX PRESSURE	3 - 10 bar (43 - 145 PSI)
	TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)
	MOUNTING POSITION	Vertical



Part Numbering System

Code	Size	Thread	-	-
N 0 5 0	3	0 7	0 0 0	0 0 0
	FRL3	07 = 3/4 09 = 1		

N050

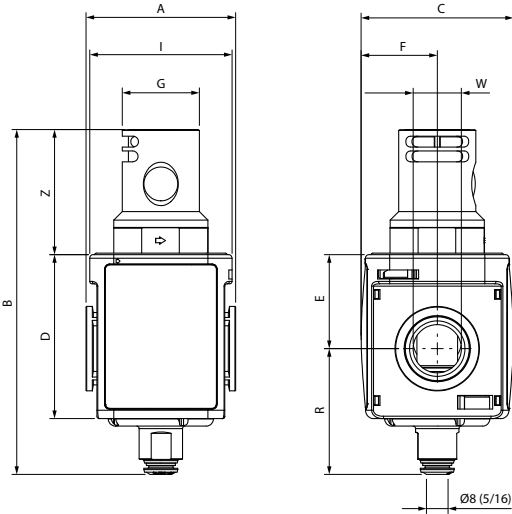

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	G	I	R	Z
90	199	92	89	3/4" - 1"	47	46	32	77.5	67	85

M = Manual


Code	Size	Thread (NPTF)	Flow Rate	Function	Drive
N050 307 000 000	V3V 3	3/4"	6700 NI/min (236.6 cfm)	NC	M/S
N050 309 000 000	V3V 3	1	6700 NI/min (236.6 cfm)	NC	M/S



Shut Off Valves

The shut off valve gets activated in the following phases:

1. By pressing the trigger switch 1, the primary circuit opens.
2. By pressing button 2, the primary circuit closes and the secondary circuit drains.
This latter position can be padlocked.

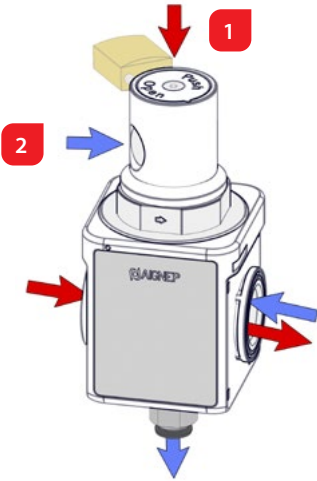

N051

PNEUMATIC SHUT OFF VALVE



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH✓

2011/65/CE
RoHS✓

PED
2014/68/UE

II 2GD Ex h TX
Ex

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2700 NI/min (95.3 cfm)	3500 NI/min (123.6 cfm)	6700 NI/min (236.6 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
FLUID	Compressed Air		
MAX PRESSURE	10 bar (145 PSI)	10 bar (145 PSI)	13 bar (188 PSI)
MINIMUM DRIVING PRESSURE	2.5 bar (36 PSI)	2.5 bar (36 PSI)	-
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		



FRL 3		
	INLET PRESSURE bar (PSI)	MINIMUM DRIVING PRESSURE bar (PSI)
	2 (29)	2 (29)
	4 (58)	3.5 (50)
	6 (87)	4.7 (68)
	8 (116)	5.8 (84)
	10 (145)	7 (101)



Part Numbering System

Code	Size	Thread	-	-
N 0 5 1	1	0 3	0 0 0	0 0 0
FRL1 → 03 = 1/4 04 = 3/8 FRL2 → 04 = 3/8 05 = 1/2 FRL3 → 07 = 3/4 09 = 1				

N051

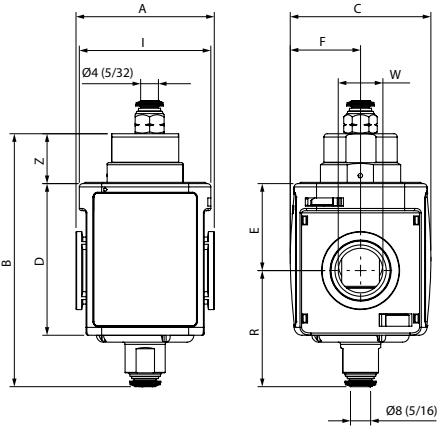

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	I	R	Z
51	98	51	57	1/4" - 3/8"	32.5	25.5	47.5	46	19.5

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	I	R	Z
62	113.5	63	68	3/8" - 1/2"	39	31.5	59	52	22

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	I	R	Z
90	141	92	89	3/4" - 1"	47	46	77.5	67	26.5

P = Pneumatic


Code	Size	Thread (NPTF)	Flow Rate	Function	Drive
N051 104 000 000	V3V 1	3/8"	2700 NI/min (95.3 cfm)	NC	P
N051 205 000 000	V3V 2	1/2"	3500 NI/min (123.6 cfm)	NC	P
N051 309 000 000	V3V 3	1"	6700 NI/min (236.6 cfm)	NC	P



Shut Off Valves

The pneumatic shut off valve gets activated in the following phases:

1. By pressurising the pilot "P", the primary circuit opens.
2. By removing pressure from the operator "P", the primary circuit closes and the secondary circuit drains.

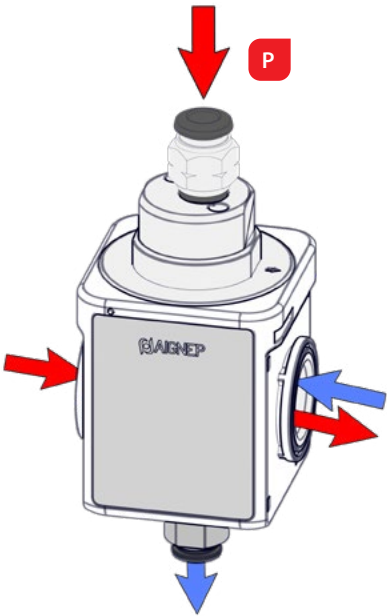

N052

MANUAL/ELECTRO-PNEUMATIC SHUT OFF VALVE



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

II 2GD Ex h TX
Ex


	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2700 NI/min (95.3 cfm)	3500 NI/min (123.6 cfm)	6700 NI/min (236.6 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
FLUID	Compressed Air		
OPERATING PRESSURE	from 2.5 bar (36 PSI) to 10 bar (145 PSI)		
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		
SOLENOID	See Chapter 18 - page 18.24 - 18.25		



Part Numbering System

Code	Size	Thread	-	-
N 0 5 2	1	0 3	0 0 0	0 0 0
	FRL1	03 = 1/4 04 = 3/8		
	FRL2	04 = 3/8 05 = 1/2		
	FRL3	07 = 3/4 09 = 1		

N052

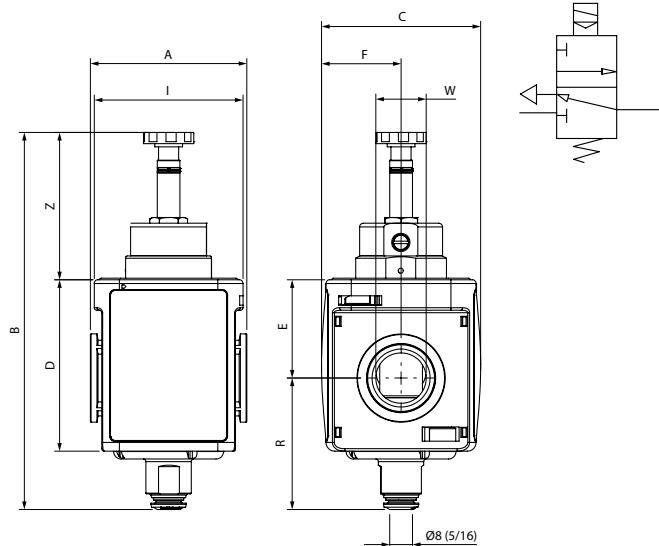

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	I	R	Z
51	98	51	57	1/4" - 3/8"	32.5	25.5	47.5	46	55

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	I	R	Z
62	113.5	63	68	3/8" - 1/2"	39	31.5	59	52	58

Dimensions (mm) - FRL 3

A	B	C	D	W	E	F	I	R	Z
90	169	92	89	3/4" - 1"	47	46	77.5	67	55

*NB: Standard without solenoid EP = Electro-pneumatic

Code	Size	Thread (NPTF)	Flow Rate	Function	Drive
N052 104 000 000	V3V 1	3/8"	2700 NI/min (95.3 cfm)	NC	EP
N052 205 000 000	V3V 2	1/2"	3500 NI/min (123.6 cfm)	NC	EP
N052 309 000 000	V3V 3	1"	6700 NI/min (236.6 cfm)	NC	EP


NB: ATEX II 2GD Ex h TX category can be reclassified in accordance to the kind of solenoid applied.



Shut Off Valves

The electro-pneumatic shut off valve gets activated in the following phases:

1. By activating the electric impulse, the primary circuit opens.
2. By removing the electric impulse, the primary circuit closes and the secondary circuit drains.

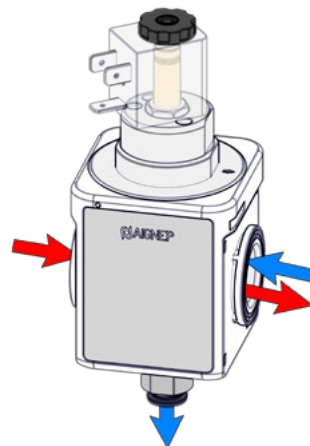

N060

SOFT START VALVE



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006

REACH

2011/65/CE

RoHS

PED

2014/68/UE

II 2GD Ex h TX

Ex



	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	2700 NI/min (95.3 cfm)	3500 NI/min (123.6 cfm)	6700 NI/min (236.6 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
MAXIMUM INLET PRESSURE	10 bar (145 PSI)		
FLUID	Compressed Air		
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
ASSEMBLY POSITION	Vertical		
MOUNTING POSITION	End of all FRL components		



Part Numbering System

Code	Size	Thread	-	-
N 0 6 0	1	0 3	0 0 0	0 0 0
FRL1 → 03 = 1/4 04 = 3/8 FRL2 → 04 = 3/8 05 = 1/2 FRL3 → 07 = 3/4 09 = 1				

N060

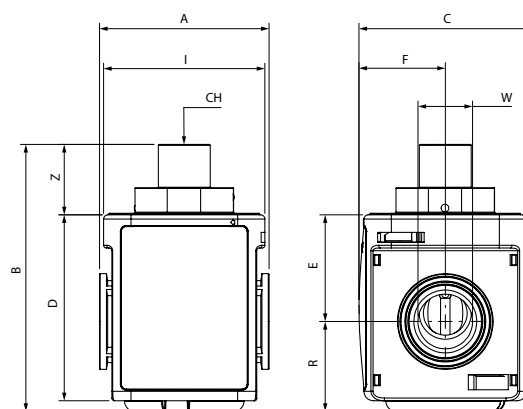

Dimensions (mm) - FRL 1

A	B	C	D	W	E	F	I	R	Z	CH
51	84.5	51	57	1/4" - 3/8"	32.5	25.5	47.5	28	23.5	5

Dimensions (mm) - FRL 2

A	B	C	D	W	E	F	I	R	Z	CH
62	97.5	63	68	3/8" - 1/2"	39	31.5	59	33	25	5

Dimensions (mm) - FRL 3


A	B	C	D	W	E	F	I	R	Z	CH
90	84.5	92	89	3/4" - 1"	47	46	77.5	67	24	5

Code	Size	Thread (NPTF)	Flow Rate
N060 103 000 000	APE 1	1/4"	2700 NI/min (95.3 cfm)
N060 104 000 000	APE 1	3/8"	2700 NI/min (95.3 cfm)
N060 204 000 000	APE 2	3/8"	3500 NI/min (123.6 cfm)
N060 205 000 000	APE 2	1/2"	3500 NI/min (123.6 cfm)
N060 307 000 000	APE 3	3/4"	6700 NI/min (236.6 cfm)
N060 309 000 000	APE 3	1"	6700 NI/min (236.6 cfm)



Soft Start Valve

Our soft start valve is a pneumatic device that allows a pneumatic circuit to be pressurised gradually. With the adjustment screw shown in the drawing to the right, you can progressively increase or decrease the air flow introduced to your pneumatic circuit. This valve is designed to completely open the air flow of your circuit at 50% of the inlet pressure.

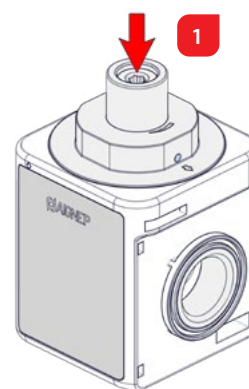

N090
AIR DISTRIBUTOR

TECHNICAL CHARACTERISTICS

Reference standard

1907/2006
REACH ✓

2011/65/CE
RoHS ✓

PED
2014/68/UE


II 2GD Ex h TX

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	3400 NI/min (120 cfm)	6100 NI/min (215.4 cfm)	11700 NI/min (413.1 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		


Part Numbering System

Code	Size	Thread X	Thread Y	-
N 0 9 0	1	0 3	0 3	0 0 0 0
FRL1		03 = 1/4 04 = 3/8	03 = 1/4 04 = 3/8	
FRL2		04 = 3/8 05 = 1/2	03 = 1/4 04 = 3/8 05 = 1/2	
FRL3		07 = 3/4 09 = 1	07 = 3/4 09 = 1	

N090

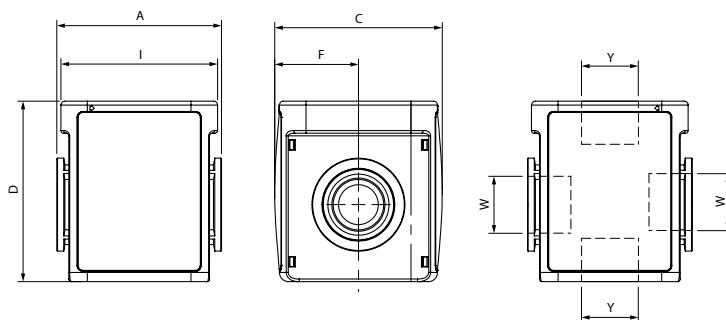

Dimensions (mm) - FRL 1

A	C	D	W	F	I	Y
51	51	57	1/4" - 3/8"	25.5	47.5	1/4" - 3/8"

Dimensions (mm) - FRL 2

A	C	D	W	F	I	Y
62	63	68	3/8" - 1/2"	31.5	59	1/4" - 3/8" - 1/2"

Dimensions (mm) - FRL 3



A	C	D	W	F	I	Y
90	92	89	3/4" - 1"	46	77.5	3/4" - 1"

Code	Size	Thread (NPTF)	Flow Rate
N090 103 030 000	DIS 1	1/4" - 1/4"	3400 NI/min (120 cfm)
N090 104 030 000	DIS 1	3/8" - 1/4"	3400 NI/min (120 cfm)
N090 104 040 000	DIS 1	3/8" - 3/8"	3400 NI/min (120 cfm)
N090 204 030 000	DIS 2	3/8" - 1/4"	6100 NI/min (215.4 cfm)
N090 204 040 000	DIS 2	3/8" - 3/8"	6100 NI/min (215.4 cfm)
N090 205 030 000	DIS 2	1/2" - 1/4"	6100 NI/min (215.4 cfm)
N090 205 050 000	DIS 2	1/2" - 1/2"	6100 NI/min (215.4 cfm)
N090 307 070 000	DIS 3	3/4" - 3/4"	11700 NI/min (413.1 cfm)
N090 309 090 000	DIS 3	1" - 1"	11700 NI/min (413.1 cfm)



Air Distributor

The air distributor allows you to branch off your air flow to several components such as pressure switches and other units. The air distributor can be placed anywhere in your air treatment unit.

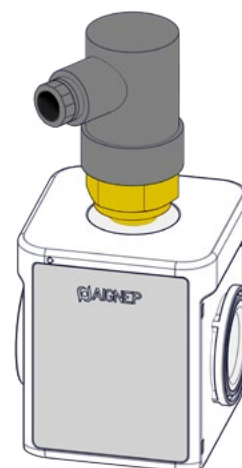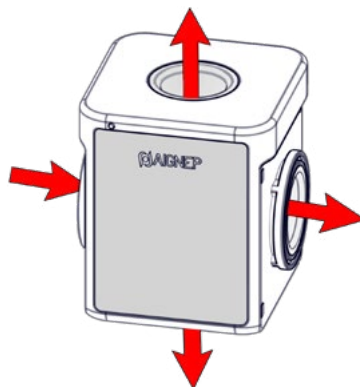

N100

FR + L



TECHNICAL CHARACTERISTICS



Reference standard

1907/2006
REACH

2011/65/CE
RoHS

PED
2014/68/UE

II 2GD Ex h TX
Ex


	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	1500 NI/min (52.9 cfm)	2700 NI/min (95.3 cfm)	5200 NI/min (183.6 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm³	37 cm³	151 cm³
FILTRATION GRADE	5 μm 20 μm STANDARD		
REGULATION RANGE	0 ÷ 2 bar (29 PSI) 0 ÷ 4 bar (58 PSI) 0 ÷ 8 bar STANDARD (116 PSI) 0 ÷ 12 bar (174 PSI)		
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
MOUNTING POSITION	Vertical		



Part Numbering System

Code	Size	Thread	Filtration	Regulation	Exhaust	Oil loading System	Manometer System
N 1 0 0	1	0 3	1	1	1	1 0 0	
FRL1	→ 03 = 1/4 04 = 3/8	1 = 5 μm 2 = 20 μm	1 = 0÷2 bar (G1 - G2) 2 = 0÷4 bar (G1 - G2) 3 = 0÷8 bar (G1 - G2 - G3) 4 = 0÷12 bar (G1 - G2 - G3)	1 = Depressure drain 2 = Automatic with float (max 8 bar)	1 = Manual 2 = Automatic vacuum-operated	0 = Manometer incorporated 2 = Adapter for manometer G1/8 (Manometer not included)	
FRL2	→ 04 = 3/8 05 = 1/2						
FRL3	→ 07 = 3/4 09 = 1						

N100

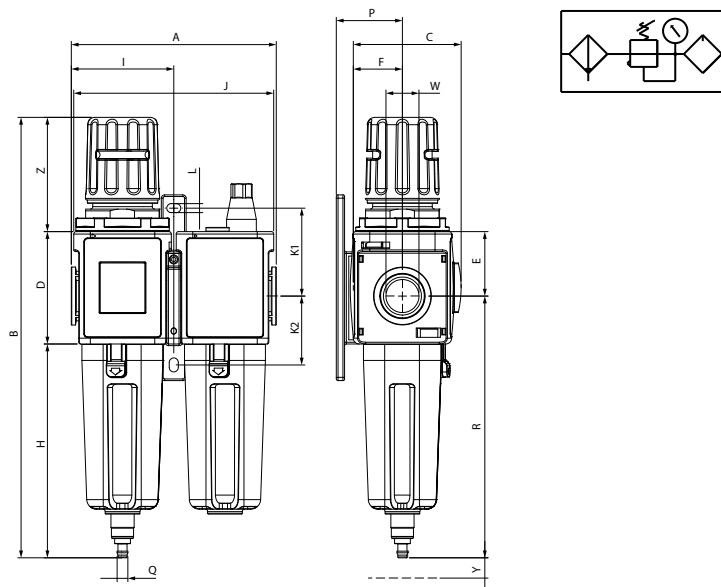

Dimensions (mm) - FRL 1

A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
102	233	57	57	32.5	25.5	119	47.5	98.5	45	35.5	5.5	34.5	ED.256 (6.5)	144	1/4"-3/8"	7	57

Dimensions (mm) - FRL 2

A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
124	270	67	68	39	31.5	129.5	59	121	53	41.5	5.5	40	ED.256 (6.5)	158.5	3/8"-1/2"	9.5	72.5

Dimensions (mm) - FRL 3

A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
180	329	96	89	47	46	161	77.5	167.5	66	55	6.5	58	ED.256 (6.5)	203	3/4"-1"	70	79

DEP = Vacuum-operated

A = Automatic


Code	Size	Thread (NPTF)	Filtration	Regulation	Flow Rate	Exhaust
N100 103 231 100	FR+L1	1/4"	20 µm	0 ÷ 8 bar (116 PSI)	1500 NI/min (52.9 cfm)	DEP
N100 104 231 100	FR+L1	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	1500 NI/min (52.9 cfm)	DEP
N100 104 232 100	FR+L1	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	1500 NI/min (52.9 cfm)	A
N100 204 231 100	FR+L2	3/8"	20 µm	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)	DEP
N100 205 231 100	FR+L2	1/2"	20 µm	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)	DEP
N100 205 232 100	FR+L2	1/2"	20 µm	0 ÷ 8 bar (116 PSI)	2700 NI/min (95.3 cfm)	A
N100 307 231 100	FR+L3	3/4"	20 µm	0 ÷ 8 bar (116 PSI)	5200 NI/min (183.6 cfm)	DEP
N100 309 231 100	FR+L3	1"	20 µm	0 ÷ 8 bar (116 PSI)	5200 NI/min (183.6 cfm)	DEP
N100 309 232 100	FR+L3	1"	20 µm	0 ÷ 8 bar (116 PSI)	5200 NI/min (183.6 cfm)	A



Regulating the Air Pressure

Follow the instructions below to set the air pressure:

- 1 Raise the knob to the regulating position.
- 2 Rotate to set the desired pressure, always in ascending order.
- 3 Press the knob down to lock into position.
The knob can be padlocked to prevent tampering.

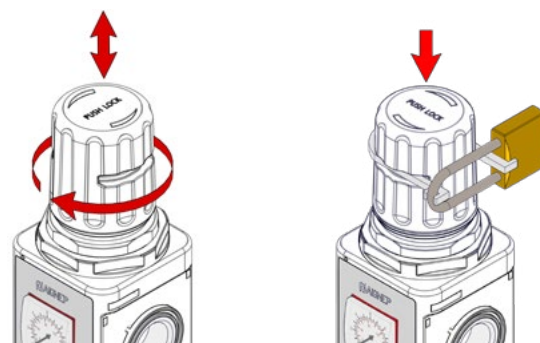

N400
FIL + FC

TECHNICAL CHARACTERISTICS

Reference standard

 1907/2006
REACH ✓

 2011/65/CE
RoHS ✓

 PED
 2014/68/UE


 II 2GD Ex h TX

	FRL 1	FRL 2	FRL 3
METALLIC THREAD	1/4" NPTF 3/8" NPTF	3/8" NPTF 1/2" NPTF	3/4" NPTF 1" NPTF
TORQUE SPECIFICATIONS	Max 15 Nm	Max 20 Nm	Max 50 Nm
6 bar FLOW RATE with Δp 1 bar	600 NI/min (21.1 cfm)	750 NI/min (26.4 cfm)	1400 NI/min (49.4 cfm)
MOUNTING SCREWS	M5 x 15	M5 x 15	M6 x 15
BOWL CAPACITY	28 cm³	37 cm³	151 cm³
FILTRATION GRADE	5 µm + 0.01 µm		
FLUID	Compressed Air		
MAX PRESSURE	15 bar (217 PSI)	15 bar (217 PSI)	13 bar (188 PSI)
TEMPERATURE	-10 °C (14 F) + 50 °C (122 F)		
CONDENSATION EXHAUST	Vacuum-operated		
MOUNTING POSITION	Vertical		


Part Numbering System

Code	Size	Thread	Filtration	Condensate exhaust System	-
N 4 0 0	1	0 3	4	0 1	0 0 0
	FRL1	→ 03 = 1/4 04 = 3/8	4 = 0.01 µm	1 = Vacuum-operated 2 = Automatic with float (max 8 bar)	
	FRL2	→ 04 = 3/8 05 = 1/2			
	FRL3	→ 07 = 3/4 09 = 1			

N400

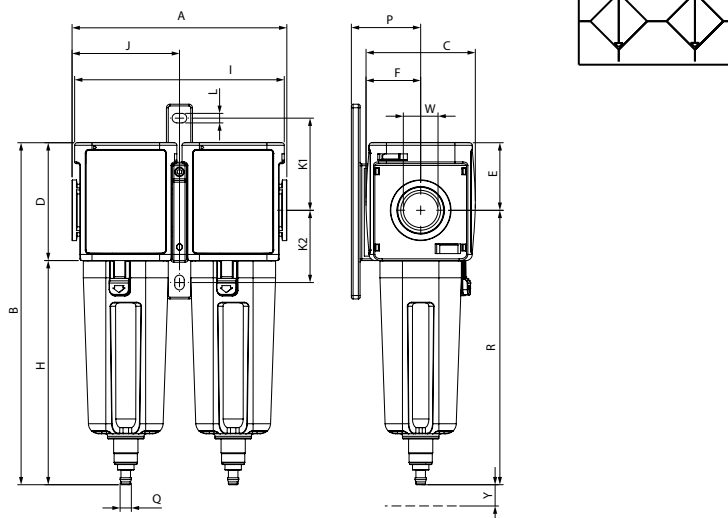

Dimensions (mm) - FRL 1

A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
102	176	57	57	32.5	25.5	119	47.5	98.5	45	35.5	5.5	34.5	ED.256 (6.5)	144	1/4"-3/8"	7	57

Dimensions (mm) - FRL 2

A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
124	197.5	67	68	39	31.5	129.5	59	121	53	41.5	5.5	40	ED.256 (6.5)	158.5	3/8"-1/2"	9.5	72.5

Dimensions (mm) - FRL 3


A	B	C	D	E	F	H	I	J	K1	K2	L	P	Q	R	W	Y	Z
180	250	96	89	47	46	161	77.5	167.5	66	55	6.5	58	ED.256 (6.5)	203	3/4"-1"	70	79

Code	Size	Thread (NPTF)	Filtration	Flow Rate
N400 103 401 000	FIL+FC 1	1/4"	5 µm + 0.01 µm	600 NI/min (21.1 cfm)
N400 104 401 000	FIL+FC 1	3/8"	5 µm + 0.01 µm	600 NI/min (21.1 cfm)
N400 204 401 000	FIL+FC 2	3/8"	5 µm + 0.01 µm	750 NI/min (26.4 cfm)
N400 205 401 000	FIL+FC 2	1/2"	5 µm + 0.01 µm	750 NI/min (26.4 cfm)
N400 307 401 000	FIL+FC 3	3/4"	5 µm + 0.01 µm	1400 NI/min (49.4 cfm)
N400 309 401 000	FIL+FC 3	1"	5 µm + 0.01 µm	1400 NI/min (49.4 cfm)




Coalescer Cartridge

The coalescer cartridge is made of a microfiber layer with an external stainless steel structure. The coalescer cartridge uses inertial impact, interception and coalesce to form liquid particles into drops. These drops will fall into the bottom of the bowl. The coalescer filter is used as an oil separator which removes oil-vapours from the air output. We recommend installing a 5 µm filter upstream to protect the coalescing filter from choking the cartridge.

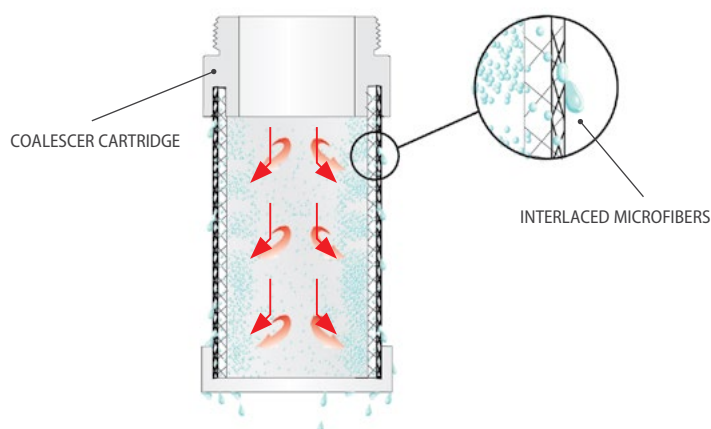

REG16

CLAMP BRACKET




Code

REG16 1Y 50 00 ZI	FRL 1
REG16 2Y 50 00 ZI	FRL 2
REG16 3Y 50 00 ZI	FRL 3

Y501

WALL MOUNT BRACKET



Code

Y501 100 000 000	FRL 1
Y501 200 000 000	FRL 2
Y501 300 000 000	FRL 3

Y502

CONNECTION BRACKET




Code

Y502 100 000 000	FRL 1
Y502 200 000 000	FRL 2
Y502 300 000 000	FRL 3



1



2



3



4

T545

COALESCER FILTER



Code

T545 10Y 000 000	FRL 1
T545 20Y 000 000	FRL 2
T545 30Y 000 000	FRL 3

T546

ACTIVE CARBON FILTER



Code

T546 10Y 000 000	FRL 1
T546 20Y 000 000	FRL 2
T546 30Y 000 000	FRL 3

It's recommended to replace the activated carbon filter (Cod. T546) every 6 months for (Cod. Y016).

FIL04

SINTERED FILTER



Code

FIL04 1Y3 805 SC	FRL 1	5 µm
FIL04 2Y3 805 SC	FRL 1	20 µm
FIL04 1Y3 820 SC	FRL 2	5 µm
FIL04 2Y3 820 SC	FRL 2	20 µm
FIL04 3Y3 820 SC	FRL 3	5 µm
FIL04 3Y3 820 SC	FRL 3	20 µm

Y520

BOWL FOR FILTER UNIT



A

DEP

Code

Y520 100 001 000	FRL 1	DEP
Y520 100 002 000	FRL 1	A
Y520 200 001 000	FRL 2	DEP
Y520 200 002 000	FRL 2	A
Y520 300 001 000	FRL 3	DEP
Y520 300 002 000	FRL 3	A

*DEP: Depressure drain

*A: Automatic with float

Y530

BOWL FOR LUBRICATOR UNIT



Code		
Y530 100 000 100	FRL 1	MAN
Y530 100 000 200	FRL 1	A
Y530 200 000 100	FRL 2	MAN
Y530 200 000 200	FRL 2	A
Y530 300 000 100	FRL 3	MAN
Y530 300 000 200	FRL 3	A

*MAN: Manual oil loading system

*A: Automatic oil loading system

MAS1


GAUGE




Code		Bar
MAS1 1N0 020 000	FRL 1	0 - 4
MAS1 1N0 040 000	FRL 1	0 - 12
MAS1 2N0 020 000	FRL 2	0 - 4
MAS1 2N0 040 000	FRL 2	0 - 12
MAS1 3N0 020 000	FRL 3	0 - 12

MAS0

GAUGE ADAPTER NPTF 1/8 NPTF

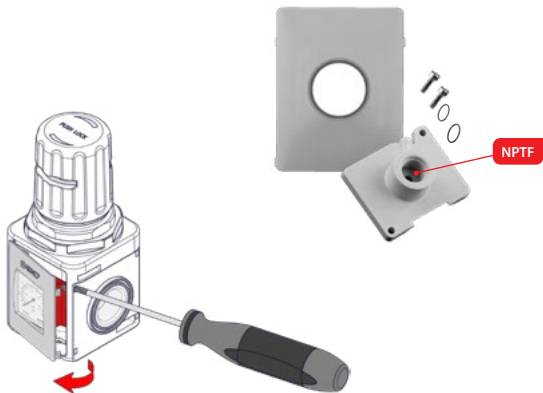

Code		NPTF
MAS0 112 000 000	FRL 1	1/8
MAS0 212 000 000	FRL 2	1/8
MAS0 312 000 000	FRL 3	1/8

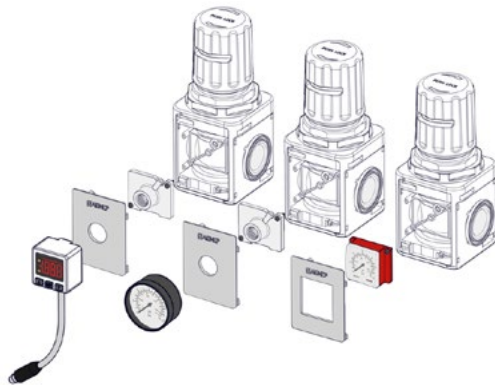



Reference Standard

EN 837-1

IP31
EN 60 529





Media

- Compressed Air
- Inert gases
- Steam
- Non-highly viscose and non-crystallizing liquids

MAN09

GAUGE BACK CONNECTION




Code	bar	D	B1	B2	SW	G (NPTF)
MAN09 N2 040 000	0 ÷ 12	40	25	41.5	12	1/8
		min		max		
		Temperature		- 20 °C + 60 °C		



Temperature

Y503

PADLOCK FOR ADJUSTER AND ADJUSTER FILTER KIT



Code	
Y503 100 000 000	FRL 1
Y503 200 000 000	FRL 2
Y503 300 000 000	FRL 3


N504

SIDE HITCH ADAPTER KIT "UNIVERSAL SHORT"




Code		G
N504 100 000 000	FRL 1	1/4
N504 200 000 000	FRL 2	1/2

It's recommended to use the sealant on the thread.

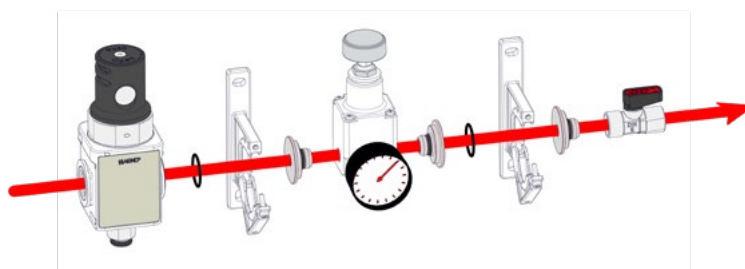


NOTES

SET YOUR FRL EVO

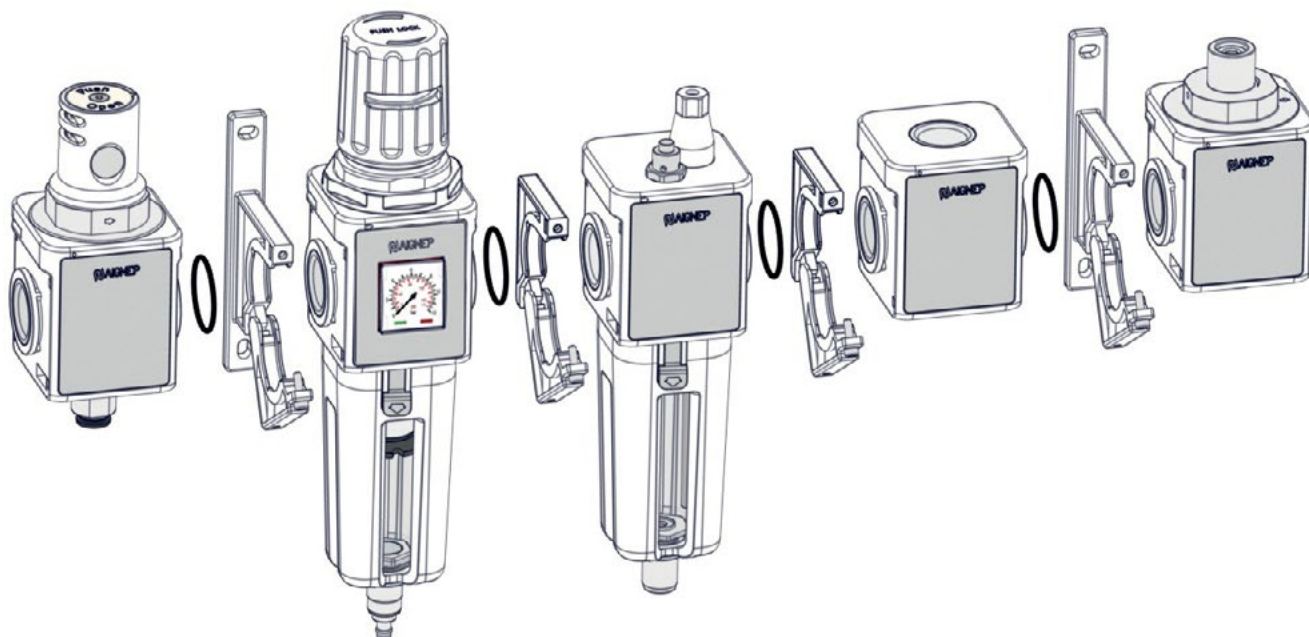

EXAMPLE:

	CODE ELEMENTS	 Y501	 Y502
1° POS	<u>Y050</u> <u>103</u> <u>000</u> <u>000</u>		
	+	☐	☒
2° POS	<u>Y030</u> <u>103</u> <u>231</u> <u>000</u>		

Introduce the element code and accessory code into the table below to configure your FRL Evo

 Y501	 Y502
☐	☒
☒	☐
☐	☒

SET YOUR FRL EVO

	CODE ELEMENTS	 Y501	 Y502
1° POS	-----		
	+ →	☐	☐
2° POS	-----		
	+ →	☐	☐
3° POS	-----		
	+ →	☐	☐
4° POS	-----		
	+ →	☐	☐
5° POS	-----		
	+ →	☐	☐
6° POS	-----		
	+ →	☐	☐
7° POS	-----		
	+ →	☐	☐
8° POS	-----		
	+ →	☐	☐
9° POS	-----		
	+ →	☐	☐
10° POS	-----		