Quick Couplings

1/4 MULTISOCKET



80190 Series

Pag. 17.3 - 17.7

STAINLESS STEEL AISI 316 L MULTISOCKET



83190 Series

Pag. 17.8 - 17.9

3/8 MULTISOCKET



80190 Series

Pag. 17.10 - 17.11

3/8 B-SOCKET - TOP FLOW



80720 Series

Pag. 17.12 - 17.13

AC MINI



80110 Series

Pag. 17.14 - 17.15

1/4 INDUSTRIAL INTERCHANGE



80120 Series

Pag. 17.16 - 17.17

3/8 INDUSTRIAL INTERCHANGE



80130 Series

Pag. 17.18 - 17.19

Safety Quick Couplings

SAFETY COUPLERS



80620 Series

Pag. 17.21 - 17.22

BUTTON SAFETY COUPLERS



8B120 Series

Pag. 17.23 - 17.24

WB 360 Series

BLOW GUNS



WB 360 Series

Pag. 17.27

Click here to view the Quick Couplings Series on our Website

WB 360 Series



TECHNICAL CHARACTERISTICS

Media

- Compressed Air
- Water



Component Parts and Materials

1 Technopolymer body
2 Anodized aluminum back connection
3 Nickel-plated brass locking nut
4 AISI 304 stainless steel nozzle

WB 361

BLOW GUN WITH STAINLESS STEEL NOZZLE



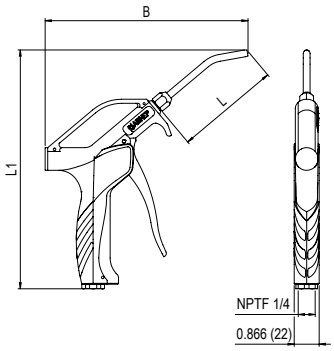

Code	L	L1	B
WB361 00 001	90	8.287 (210.5)	7.047 (179)

	min	max
Temperature	14 °F (-10 °C)	176 °F (80 °C)
Pressure	174 psi (12 bar) (1.2 MPa)	
433 Nl/min @ 87 psi (6 bar) - 533 Nl/min @ 116 psi (8 bar)		
LAeq 89 dBA @ 87 psi (6 bar)		
LAeq 90 dBA @ 116 psi (8 bar)		
Force on handle	19,8 N @ 87 psi (6 bar)	
Blowing force	3,7 N @ 87 psi (6 bar)	
2003/10/CE	Max 85 dBA	3 hr @ 87 psi (6 bar) 3 hr @ 116 psi (8 bar)
OSHA 1910.95 (b)	Max 90 dB 8 hr	

WB 362

BLOW GUN WITH STAINLESS STEEL NOZZLE

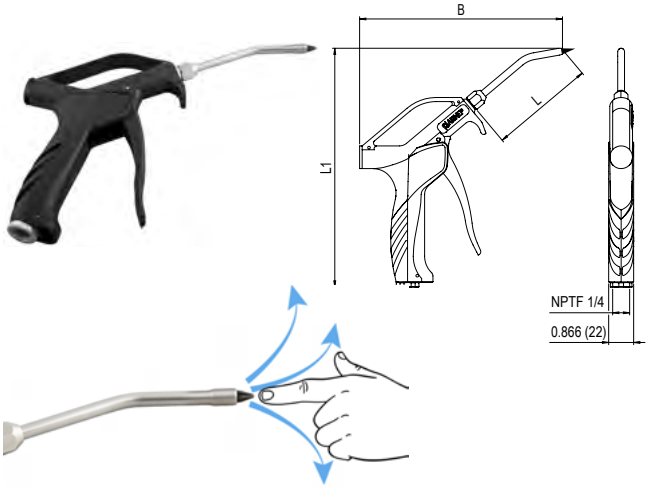

Code	L	L1	B
WB362 00 001	90	8.287 (210.5)	7.303 (185.5)

	min	max
Temperature	14 °F (-10 °C)	176 °F (80 °C)
Pressure	174 psi (12 bar) (1.2 MPa)	
383 Nl/min @ 87 psi (6 bar) - 500 Nl/min @ 116 psi (8 bar)		
LAeq 78 dBA @ 87 psi (6 bar)		
LAeq 84 dBA @ 116 psi (8 bar)		
Force on handle	19,8 N @ 87 psi (6 bar)	
Blowing force	3,4 N @ 87 psi (6 bar)	
2003/10/CE	Max 85 dBA	8 hr @ 87 psi (6 bar) 6 hr @ 116 psi (8 bar)
OSHA 1910.95 (b)	Max 90 dB 8 hr	
OSHA 1910.242 (b)	Max 30 psi (2,1 bar) when blocked	